

US 40/MD 639 IS ASSUMED TO RUN
IN AN EAST-WEST DIRECTION

THE CONTACT PERSONS FOR DISTRICT #6/00TS ARE AS FOLLOWS:

District #6

Office of Traffic & Safety

Mr. George Small
Assistant District Engineer - Traffic
Phone: 301-729-8444

Mr. Richard L. Daff Sr.
Chief, Traffic Operations Division
Phone: 410-787-7630

Mr. David Felker
District Utility Engineer
Phone: 301-729-8439

Mr. Robert Snyder
Assistant Division Chief, Traffic Operations
Phone: 410-787-7630

Mr. Anthony Crawford
Assistant District Engineer - Maintenance
Phone: 301-729-8457


Mr. Edward Rodenhizer
Chief, SHA Traffic Signal Shop
Phone: 410-787-7650

Mr. John True
Assistant District Engineer - Construction
Phone: 301-729-8411

Mr. Eugene Bailey
Team Leader Sign Operation
410-787-7670

The Power Company Representative is:
Allegheny Power
800 Cabin Hill Drive
Greensburg, PA 15601
Phone: 1-800-255-3443

City of Cumberland Contact is:
Department of Public Works
215 Bowen Street
P.O. Box 1702
Cumberland, MD 21502
Phone: 301-753-6620

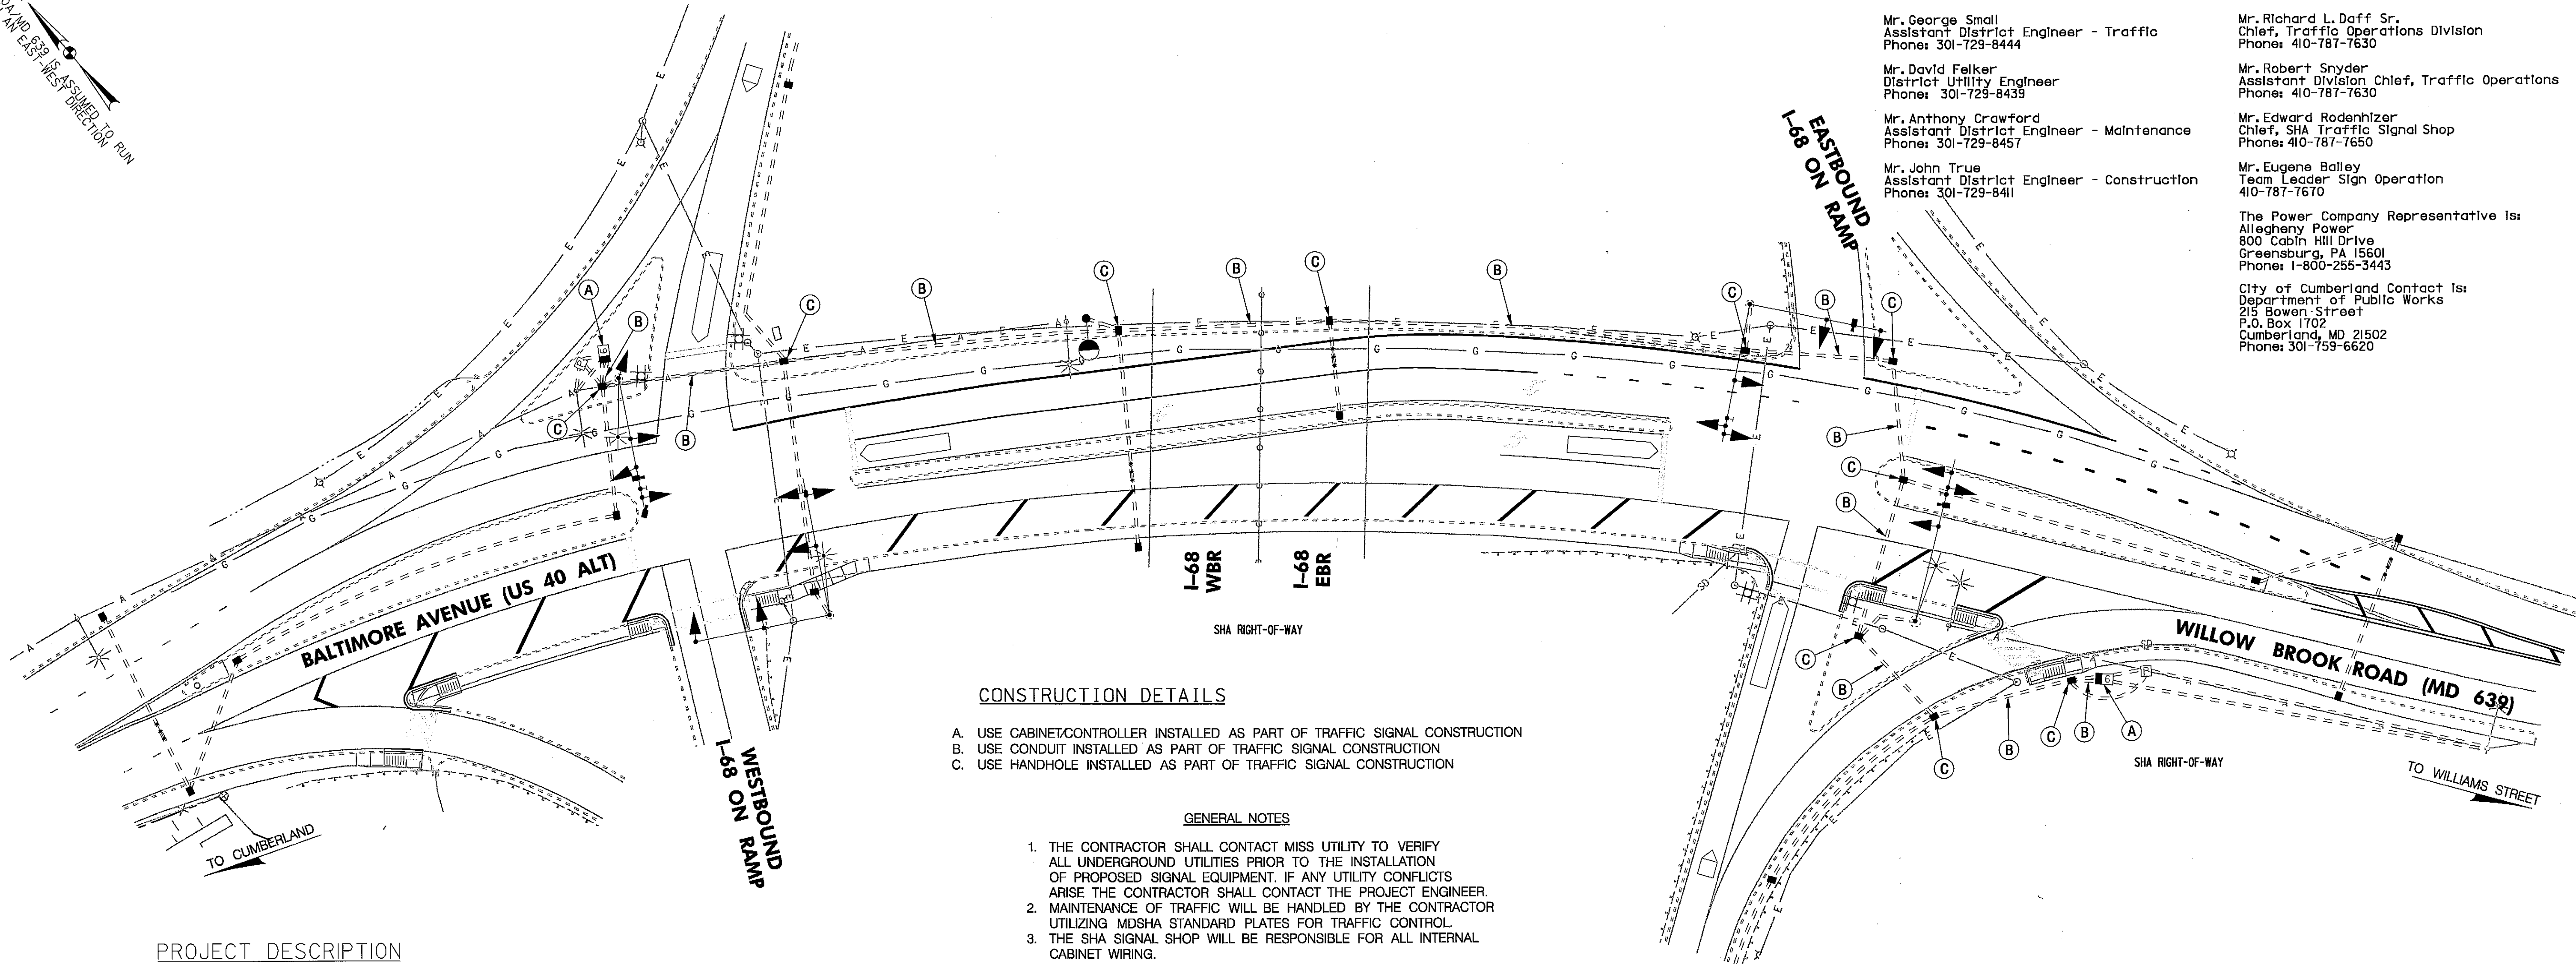

CONSTRUCTION DETAILS

- A. USE CABINET/CONTROLLER INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION
B. USE CONDUIT INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION
C. USE HANDHOLE INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION


GENERAL NOTES

1. THE CONTRACTOR SHALL CONTACT MISS UTILITY TO VERIFY ALL UNDERGROUND UTILITIES PRIOR TO THE INSTALLATION OF PROPOSED SIGNAL EQUIPMENT. IF ANY UTILITY CONFLICTS ARISE THE CONTRACTOR SHALL CONTACT THE PROJECT ENGINEER.
2. MAINTENANCE OF TRAFFIC WILL BE HANDLED BY THE CONTRACTOR UTILIZING MDSHA STANDARD PLATES FOR TRAFFIC CONTROL.
3. THE SHA SIGNAL SHOP WILL BE RESPONSIBLE FOR ALL INTERNAL CABINET WIRING.

PROJECT DESCRIPTION

GENERAL

THIS PORTION OF THE PROJECT INVOLVES THE INSTALLATION OF INTERCONNECT COMMUNICATION CABLE ALONG US 40 ALT (BALTIMORE AVENUE)/MD 639 (WILLOW BROOK ROAD) BETWEEN THE I-68 EAST- AND WESTBOUND RAMPS. US 40 ALT/MD 639 IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.

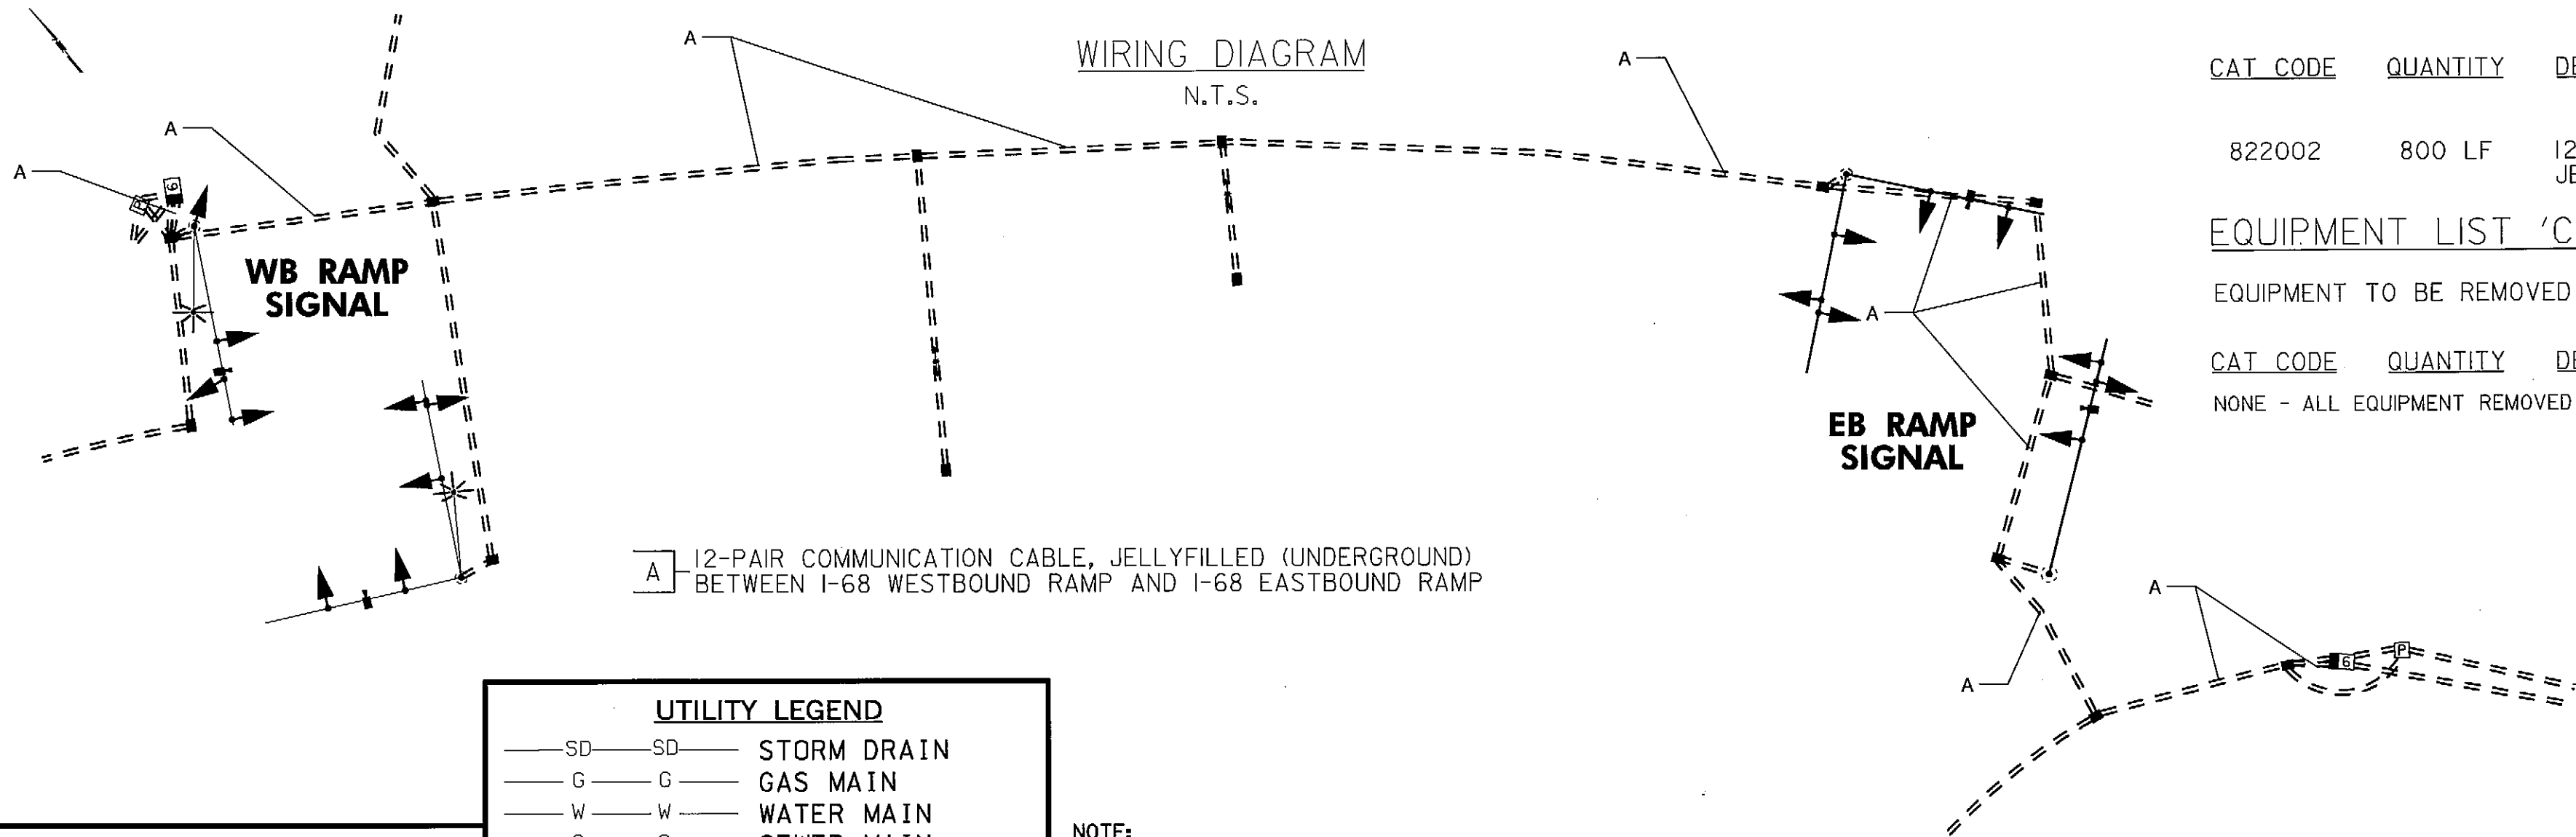

EQUIPMENT LIST 'A'

APPROVED SHA EQUIPMENT TO BE PURCHASED BY THE DEVELOPER AND INSTALLED BY THE CONTRACTOR. ALL EQUIPMENT IN THIS LIST SHALL HAVE CATALOG CUTS SUBMITTED FOR APPROVAL PRIOR TO INSTALLATION.

CAT CODE QUANTITY DESCRIPTION

822002 800 LF 12-PAIR COMMUNICATION CABLE, JELLY-FILLED (UNDERGROUND)

EQUIPMENT LIST 'C'

EQUIPMENT TO BE REMOVED AND RETURNED TO SHA.

CAT CODE QUANTITY DESCRIPTION

NONE - ALL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE CONTRACTOR

EQUIPMENT LIST 'B'

EQUIPMENT TO BE PURCHASED BY THE DEVELOPER AND INSTALLED BY THE CONTRACTOR. ALL EQUIPMENT IN THIS LIST SHALL HAVE CATALOG CUTS SUBMITTED FOR APPROVAL PRIOR TO INSTALLATION.

CAT CODE QUANTITY DESCRIPTION

120500 1 LS MAINTENANCE OF TRAFFIC
822500 1 EA AS BUILT FOR SHA ON CADD

GEOMETRIC LEGEND

--- EXISTING
=== PROPOSED

APPROVALS	REVISIONS
TEAM LEADER <i>[Signature]</i> 2/4/09	
ASST. DIV. CHIEF <i>[Signature]</i> 2/4/09	
DIVISION CHIEF <i>[Signature]</i> 2/17/09	
OFFICE DIRECTOR <i>[Signature]</i> 2/17/09	

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

WILLOW BROOK ROAD (US 40 ALT/MD 639) AT
I-68 RAMPS

INTERCONNECT PLAN & GENERAL INFORMATION

SCALE 1" = 30' DATE FEBRUARY 2009 CONTRACT NO. BW996M82

DESIGNED BY MML COUNTY ALLEGANY
DRAWN BY MML LOGMILE 010040A13.58
CHECKED BY MML T.I.M.S. NO. J332
F.A.P. NO. N/A TOD NO.

DRAWING NO. TS-4703-IC OF SHEET NO. OF

LENHART TRAFFIC CONSULTING
TRAFFIC ENGINEERING & TRANSPORTATION PLANNING
331 Redwood Grove Court Millersville, Maryland 21108
Tel: (410) 987-3888 Fax: (443) 782-2288

NOTE:
THESE PLANS ARE APPROVED FOR CONSTRUCTION FOR A PERIOD OF ONE (1) YEAR. SHOULD CONSTRUCTION NOT BEGIN WITHIN THIS TIME FRAME, THESE PLANS SHALL BE NULL AND VOID WITH A RE-REVIEW FROM THE TRAFFIC ENGINEERING DESIGN DIVISION.
EAPD PERMIT NO. _____