


N
MD 7 IS ASSUMED TO RUN
IN AN EAST-WEST DIRECTION

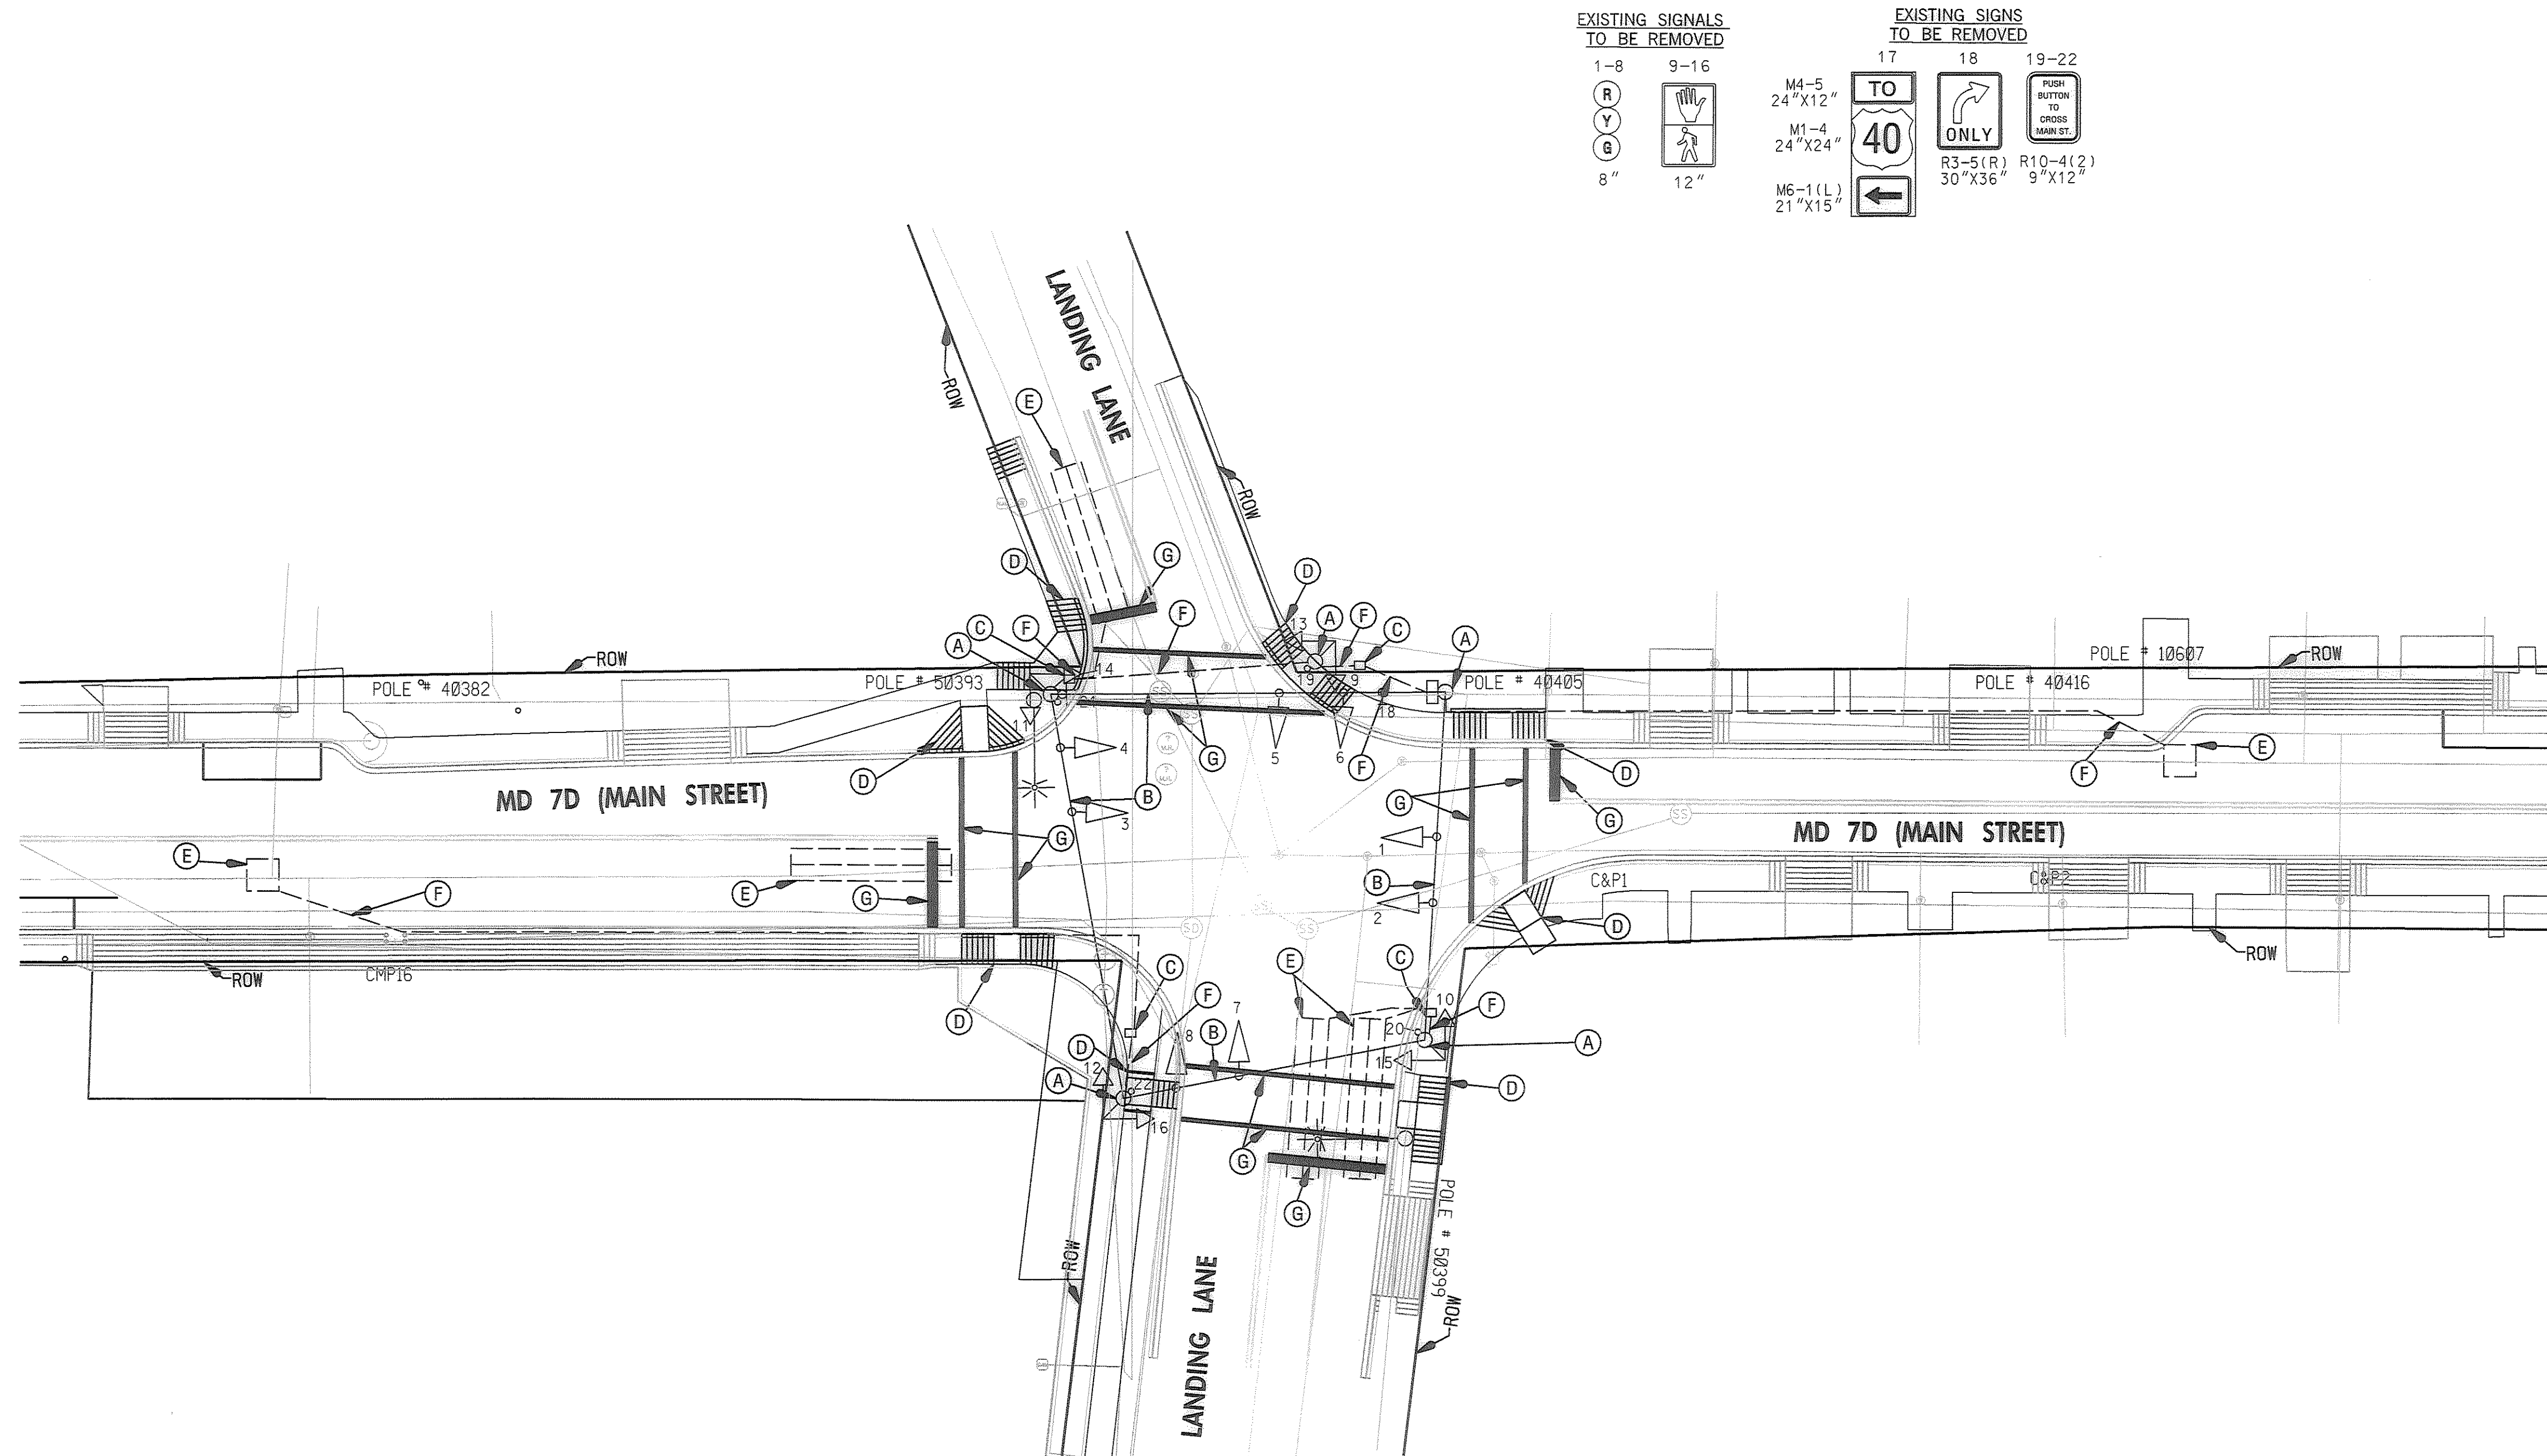

EXISTING SIGNALS
TO BE REMOVED

1-8	9-16
R	Y
8"	12"

EXISTING SIGNS
TO BE REMOVED

17	18	19-22
M4-5 24"x12"	TO 40	ONLY
M1-4 24"x24"	R3-5(R) 30"x36"	R10-4(2) 9"x12"
M6-1(L) 21"x15"		

CONSTRUCTION DETAILS:

- (A) REMOVE EXISTING POLE, FOUNDATION, CONTROLLER CABINET, AND SIGNAL EQUIPMENT. REMOVE ALL FOUNDATIONS TO 12 IN. BELOW GRADE AND BACKFILL.
- (B) REMOVE EXISTING SPAN WIRE, SIGNALS, SIGNS, AND ALL ASSOCIATED EQUIPMENT.
- (C) REMOVE EXISTING HANDHOLE.
- (D) SEE ROADWAY PLAN SHEET P5 FOR SIDEWALK AND RAMP CONSTRUCTION. RAMP SHALL BE INSTALLED ACCORDING TO SHA STANDARD NO. MD 655.11 AND MD 655.12.
- (E) EXISTING LOOP DETECTOR TO BE ABANDONED.
- (F) CAP AND ABANDON EXISTING CONDUIT.
- (G) SEE SIGNING AND PAVEMENT MARKING PLAN SHEET SN-2.4.

EQUIPMENT LIST 'B'

B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY THE CONTRACTOR				
ITEM NO.	CATEGORY	CODE NO.	SPEC. NO.	QUANTITY
8001	800000	800	1 LS	REMOVE AND DISPOSE EXISTING EQUIPMENT

GENERAL NOTES:

- MAINTAIN EXISTING ALL-WAY STOP CONTROL CONDITION.
- ALL EXISTING TRAFFIC SIGNAL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE SIGNAL CONTRACTOR.

GEOMETRIC LEGEND

— — — — — EXISTING
— — — — — PROPOSED

UTILITY LEGEND

—SD—SD— STORM DRAIN
—G—G— GAS MAIN
—W—W— WATER MAIN
—S—S— SEWER MAIN
—E—E— ELECTRIC CABLES
—A—A— AERIAL CABLES
—T—T— TELEPHONE CABLES
—F—F— FIBER-OPTIC

SHA

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

MD 7D (MAIN STREET)
AT LANDING LANE

TRAFFIC SIGNAL PLAN

SCALE 1" = 20' DATE 04/25/20 CONTRACT NO. C-502-275

DESIGNED BY _____ COUNTY CECIL
DRAWN BY L.T.H. KILIAN LOGMILE 0.00 - 0.66
CHECKED BY _____ T.I.M.S. NO. 1872
F.A.P. NO. _____ TOD NO. TS-133B

DRAWING NO. SG 01 OF 01 SHEET NO. 30 OF 50

REVISION B CONSULTANT

WALLACE, MONTGOMERY & ASSOCIATES, LLP
CIVIL AND STRUCTURAL ENGINEERS
110 West Road, Suite 300
Towson, Maryland 21204
(410) 494-9093, (410) 825-5714 Fax
www.WallaceMontgomery.com

APPROVALS

TEAM LEADER
ASST. DIV. CHIEF
DIVISION CHIEF
OFFICE DIRECTOR

ORIGINAL
OK
FILE

REVISIONS

1	REMOVE SIGNAL	06/20/08
2	REPLACE SIGNALS, LOOPS AND CABLE. INSTALL PED. POLE. CONTRACT NO. CE-614-501-265.	04/25/08

JR RSE WAZ EFP TH

PLOTTED: Monday, December 15, 2008
FILE: \$FILEL\$