

PROJECT DESCRIPTION

I. GENERAL

THIS PROJECT INVOLVES THE REMOVAL OF THE EXISTING TRAFFIC SIGNAL AT THE INTERSECTION OF MD 268 AND MD 7D IN CECIL COUNTY. MD 7D IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION. THE IMPROVEMENTS ALSO INCLUDE THE REMOVAL OF EXISTING INTERCONNECT ALONG MD 7D FROM BRIDGE STREET TO NORTH STREET.

II. INTERSECTION OPERATION

THIS SIGNAL IS BEING REMOVED AND THE INTERSECTION OPERATES AS AN ALL-WAY STOP. MD 7D IS A ONE WAY STREET RUNNING EAST TO WEST. MD 268 IS ASSUMED TO RUN A NORTH/SOUTH DIRECTION.

CONTACTS

Mr. Jeffery Wentz  
Assistant District Engineer - Traffic  
Phone: (410) 810-3240

Mr. Henry Teets  
Assistant District Engineer - Maintenance  
Phone: (410) 810-3250

Mr. Barry Clothier  
Utility Engineer  
Phone: (410) 810-3275

Mrs. Corren Johnson  
Chief, Traffic Operations Division  
Phone: (410) 787-7830

Mr. Ed Rodenhizer  
Supervisor, Signal Operations  
Phone: (410) 787-7650

EQUIPMENT LIST FOR CONTRACT NO. XY1315185

A. EQUIPMENT TO BE FURNISHED BY STATE HIGHWAY ADMINISTRATION


ITEM	QUANTITY	UNIT	DESCRIPTION
9570	4	SF	SHEET ALUMINUM GROUND MOUNTED SIGN
	1	EA	M1-5 (30" x 24")
	1	EA	M3-1 (24" x 12")
	1	EA	M6-1 (21" x 15")

C. EQUIPMENT TO BE REMOVED.

SHA FORCES SHALL REMOVE THE CONTROLLER AND ALL AUXILIARY EQUIPMENT FROM THE CONTROLLER CABINET. ALL OTHER EXISTING SIGNAL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE SIGNAL CONTRACTOR UPON COMPLETION OF THE SIGNAL.

B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY CONTRACTOR

ITEM	QUANTITY	UNIT	DESCRIPTION
1001	1	EA	MAINTENANCE OF TRAFFIC
6001	100	LF	STANDARD TYPE A COMBINATION CURB AND GUTTER
			12 INCH GUTTER PAN 8 INCH DEPTH
6002	300	SF	5 INCH CONCRETE SIDEWALK
6003	40	SF	DETECTABLE WARNING SURFACE FOR CURB RAMPS
8028	1	EA	REMOVE & DISPOSE OF EQUIPMENT (PER ASSIGNMENT)
8046	30	SF	REMOVE & RESET DECORATIVE BRICK SIDEWALK
*NEG	100	SF	BRICK SIDEWALK

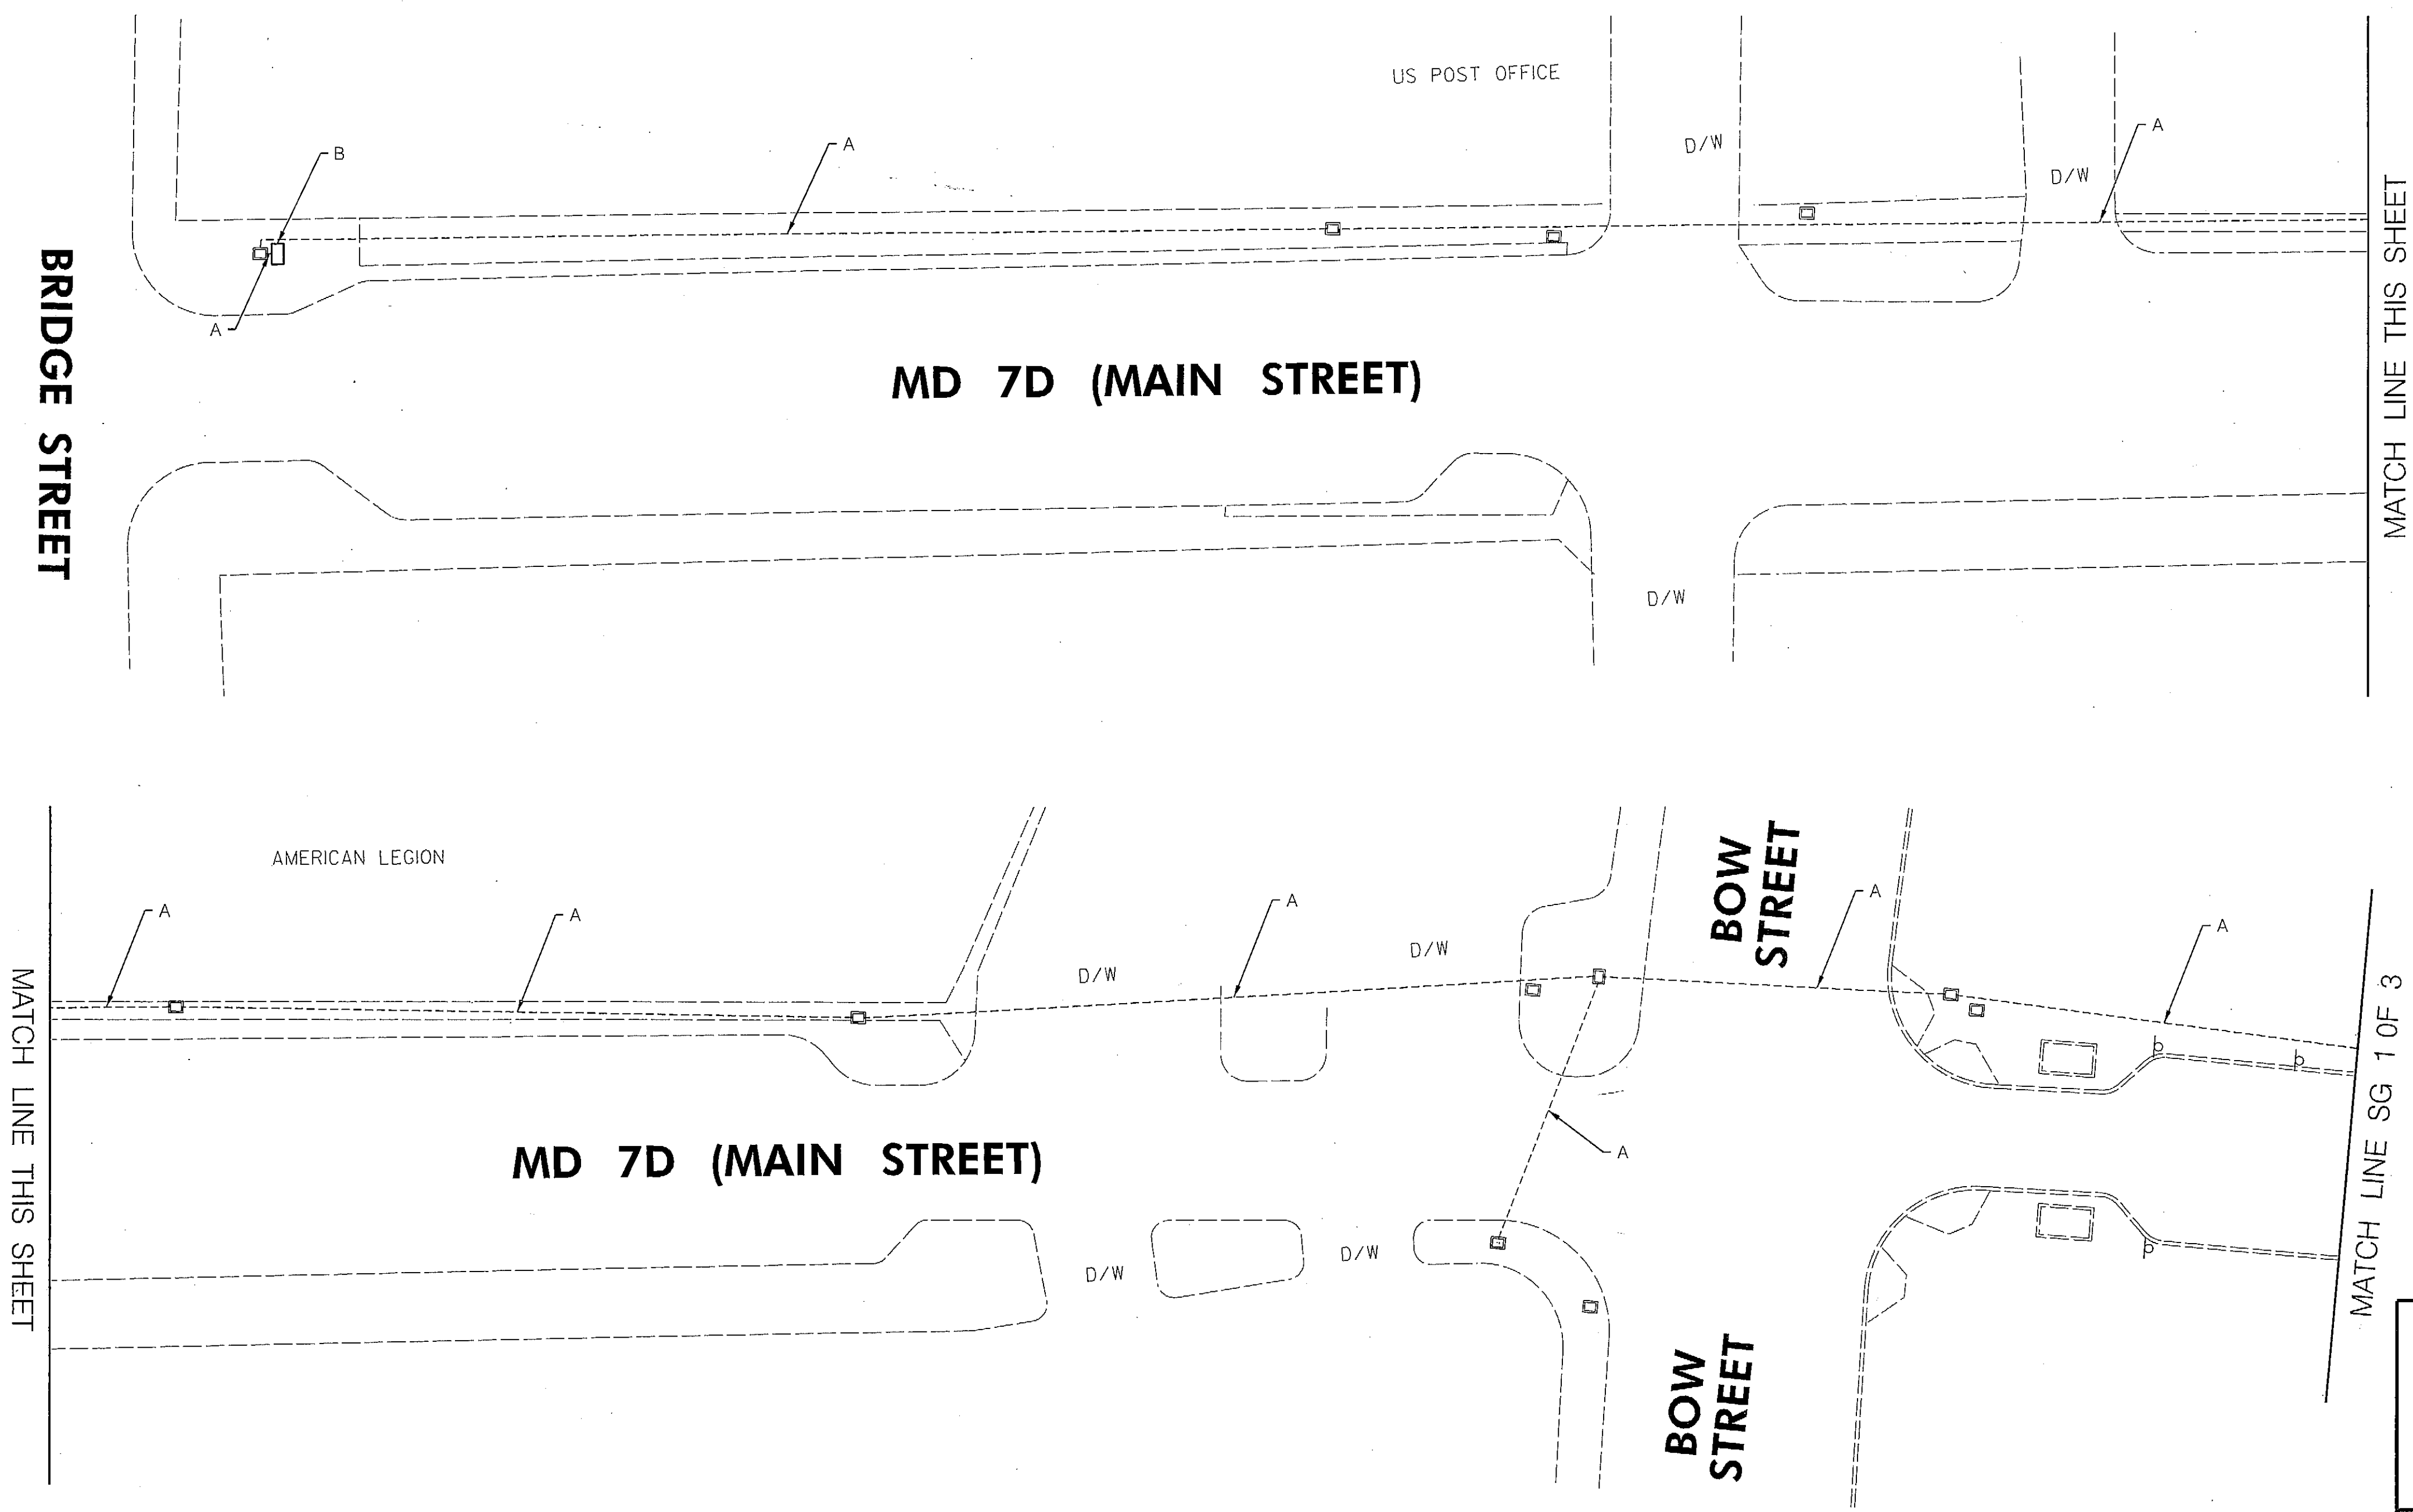

CONSTRUCTION DETAILS:

- A. REMOVE EXISTING INTERCONNECT CABLE.  
B. REMOVE I/C TO NORTH ST FROM EXISTING CABINET.

TOD NO: XY131-01  
SHA NO: CE290B51  
MD 268 @ Main Street



STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF TRAFFIC & SAFETY  
TRAFFIC ENGINEERING DESIGN DIVISION  
MD 268 (NORTH STREET)  
AT MD 7D (MAIN STREET)  
ELKTON MD

INTERCONNECT PLAN SHEET

SCALE 1" = 20' ADVERTISED DATE 06/2013 CONTRACT NO. XY1315185

DESIGNED BY CW COUNTY CECIL  
DRAWN BY CW LOGMILE 07026800.00  
CHECKED BY RM TMS NO. L 964  
F.A.P. NO. TOD NO.

TS NO. 59-G-GI DRAWING SG-3 OF 3 SHEET NO. 3 OF 3



BRUDIS & ASSOCIATES, INC.  
Consulting Engineers  
9240 Runsey Road, Suite C  
Columbia, Maryland 21045  
Phone: 410-854-3807  
www.brudis.com

PLOTTED: Monday, June 03, 2013 AT 10:52 AM  
FILE: P:\09-002 TEDD\Task 123 MD 268 at Main St\Drawings\CADD\Working\SG-P003\_M268@Main.dgn

BY: fanrong