


MD 275 IS ASSUMED TO RUN  
IN A NORTH/SOUTH DIRECTION


OVERHEAD LINE HEIGHTS  
AT 12' EAST OF POLE  
C&P = 21'-9"  
C&P = 23'-2"  
C&P = 25'-0"

OVERHEAD LINE HEIGHTS  
AT 10' SOUTH OF POLE  
CATV = 21'-8"  
C&P = 24'-5"  
SECONDARY = 26'-5"  
PRIMARY = 31'-2"



### EXISTING SIGNS

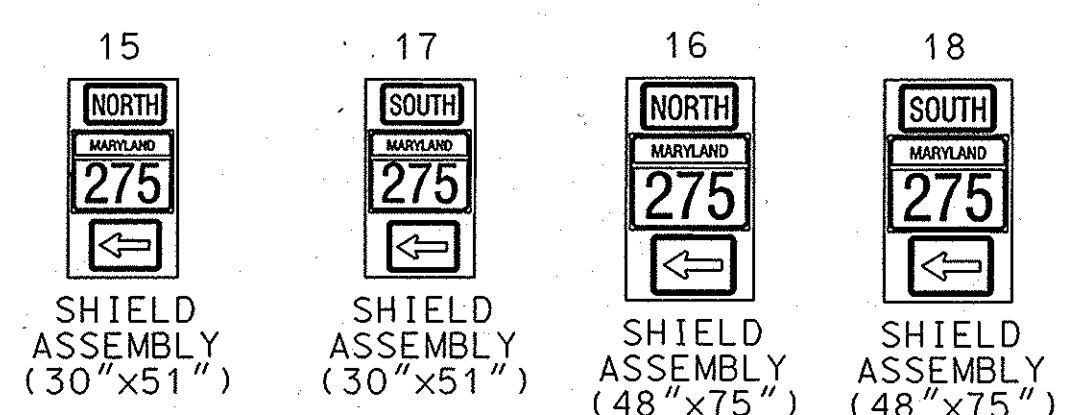

### EXISTING SIGNALS TO BE REMOVED

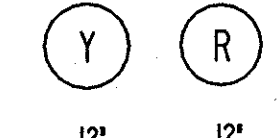

### PROPOSED LED SIGNALS

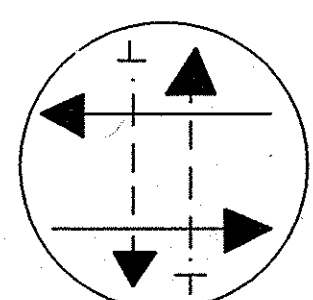

FLASHING  
OPERATION

CRAIGTOWN RD  
D-3(1)  
(VAR. x16")

### CONSTRUCTION DETAILS

A. REMOVE EXISTING SIGNAL HEADS AND INSTALL PROPOSED LED  
SIGNAL HEADS.

### GENERAL NOTES

- VIDEO CAMERA LOCATION / ALIGNING SHALL BE COORDINATED WITH THE SHA ENGINEER.
- THE CONTRACTOR SHALL VERIFY ALL PROPOSED POLE AND CABINET LOCATIONS PRIOR TO INSTALLATION.
- FOR FINAL PAVEMENT MARKINGS REFER TO THE PAVEMENT MARKING PLANS, OTHER THAN THOSE DETAILED ON THE PLAN. ALL PAVEMENT MARKINGS SHALL BE INSTALLED IN ACCORDANCE WITH MSHA STANDARDS.
- ALL EXISTING TRAFFIC SIGNAL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE SIGNAL CONTRACTOR UPON COMPLETION OF THE NEW SIGNAL.
- ALL PROPOSED LUMINAIRES SHALL BE SUPPLIED WITH A PHOTOCCELL.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING ALL SIGNAL CABLE TO THE APPROPRIATE TERMINALS AND PROPERLY LABEL EACH CABLE.
- THE CONTRACTOR SHALL VERIFY ALL UNDERGROUND UTILITIES PRIOR TO INSTALLING PROPOSED SIGNAL EQUIPMENT. IF ANY UTILITY CONFLICTS SHOULD ARISE THE CONTRACTOR SHALL CONTACT THE PROJECT ENGINEER.
- ALL TRAFFIC SIGNAL FOUNDATIONS SHALL BE INSTALLED AT THE FINAL SIDEWALK OR CURB GRADE FOR CLOSED SECTIONS. HIGHEST ROADWAY PROFILE GRADE FOR OPEN SECTIONS. TO MEET CLEARANCES AS SPECIFIED IN MD 816.03, MD 818.01, MD 818.02, MD 818.04. THE CONTRACTOR SHALL VERIFY ULTIMATE GRADES PRIOR TO THE INSTALLATION OF ALL SIGNAL EQUIPMENT.

### GEOMETRIC LEGEND

EXISTING  
PROPOSED

### UTILITY LEGEND

SD — SD — STORM DRAIN  
G — G — GAS MAIN  
W — W — WATER MAIN  
S — S — SEWER MAIN  
E — E — ELECTRIC CABLES  
A — A — AERIAL CABLES  
T — T — TELEPHONE CABLES  
F — F — FIBER-OPTIC



STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF TRAFFIC & SAFETY  
TRAFFIC ENGINEERING DESIGN DIVISION  
MD 275 at Craigtown Road

TOD NO: XX48-01  
SHA NO: CE34851/051  
MD 275 @ CRAIGTOWN RD

APPROVALS		REVISIONS		SIGNALIZATION PLAN SHEET	
TEAM LEADER		① INSTALL NEAR SIDE SIGNAL HEADS UPGRADE TO LED		SCALE 1"=20' ADVERTISED DATE June 30, 1998 CONTRACT NO. AW2765185	
ASST. DIR. CHIEF		XX4485185 03/31/2008		DESIGNED BY TEKIE MESKEL COUNTY CECIL	
DIVISION CHIEF		FJA		DRAWN BY LOGMILE 07027501.67	
OFFICE DIRECTOR				CHECKED BY TEKIE MESKEL TMS NO. 1812	
				F.A.P. NO. TOD NO.	
				TS NO. 3821 A DRAWING SG-1 OF 1 SHEET NO. 1 OF 2	

PLOTTED: Monday, March 31, 2008 at 8:27:30 AM  
FILE: 812GPD1.dgn