

DRILL HOLES

BURDER REV. DATE: June 1, 2004

DRILL HOLES

DRILL HOLES


BY: wagner

US 40 IS ASSUMED TO RUN
IN AN EAST-WEST DIRECTION


PROPOSED SIGNAL EQUIPMENT

a.b.c.d
PROPOSED VIDEO
DETECTION


EXISTING SIGNS

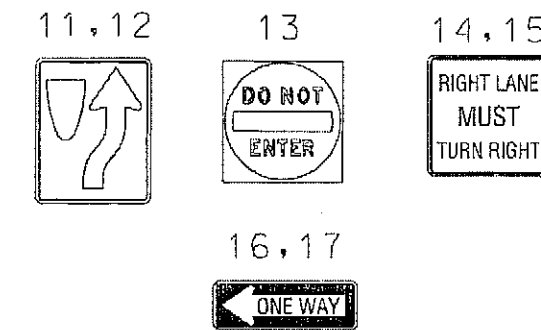

EXISTING SIGNALS

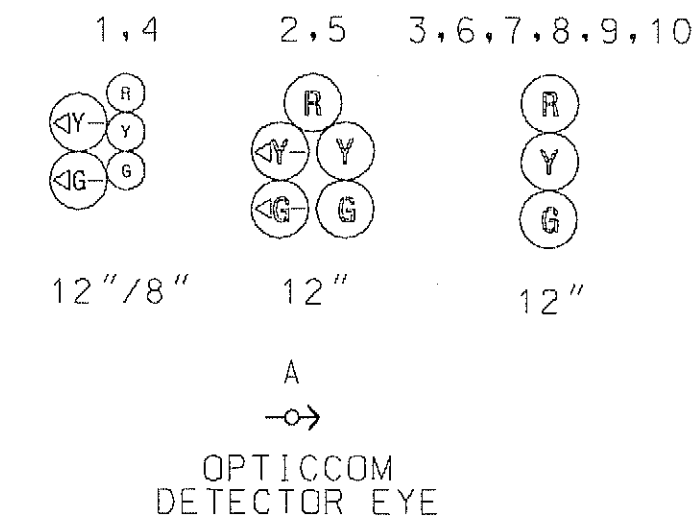

NEMA PHASING

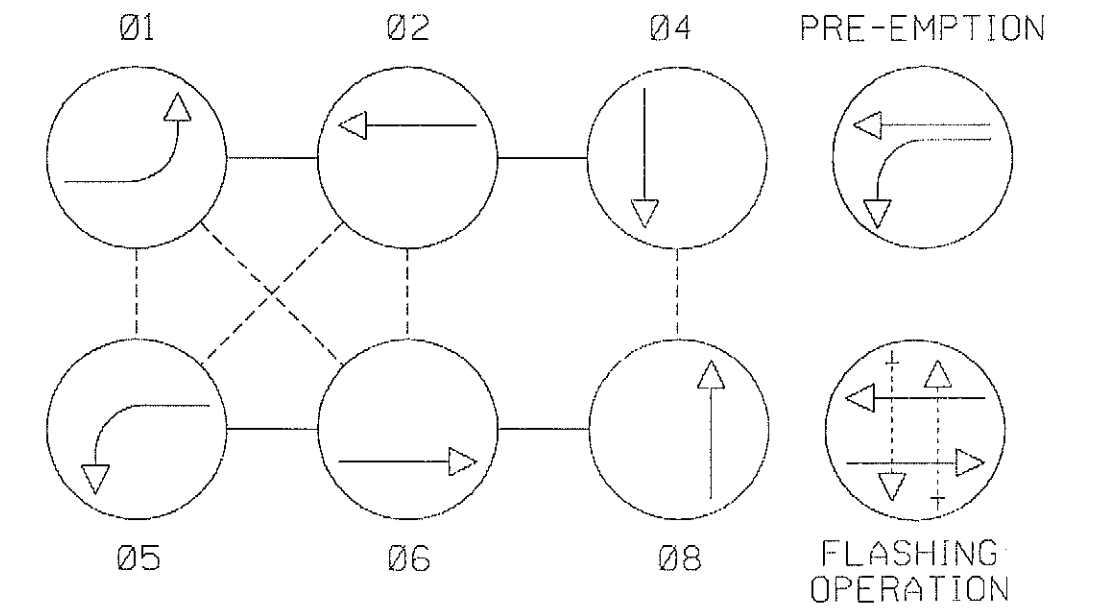

NEMA NOTES:
1. PHASES ASSOCIATED BY A DASHED LINE
WILL OPERATE CONCURRENTLY.
2. PHASES ASSOCIATED BY A SOLID LINE
WILL NOT OPERATE CONCURRENTLY.

EXISTING CAMERA TO BE REMOVED

C1

TO WHITEHALL RD

US 40 (PULASKI HWY)

US 40 (PULASKI HWY)

CONSTRUCTION DETAILS

- USE EXISTING STRAIN POLE. INSTALL PROPOSED VIDEO DETECTION CAMERA(S).
- USE EXISTING HANDHOLE.
- USE EXISTING CONDUIT.
- INSTALL HANDHOLE WITH THE LONG EDGE PERPENDICULAR TO THE ROADWAY AS SHOWN.
- INSTALL 3 IN. PVC (SCHEDULE 80) ELECTRICAL CONDUIT - BORED.
- INSTALL 3 IN. PVC (SCHEDULE 80) ELECTRICAL CONDUIT - TRENCHED.
- INSTALL NON-INVASIVE PROBES (SET OF 3).
- ABANDON EXISTING LOOP DETECTORS AND REMOVE ALL ASSOCIATED WIRING.
- USE EXISTING CABINET AND CONTROLLER. INSTALL VIDEO DETECTION EQUIPMENT (BY SHA FORCES).
- USE EXISTING SPAN WIRE.
- USE EXISTING POLE. REMOVE EXISTING VIDEO DETECTION CAMERA. INSTALL PROPOSED CAMERA.
- EXISTING VIDEO DETECTION ZONE TO BE ADJUSTED BY SHA FORCES.
- USE EXISTING STRAIN POLE.

GENERAL NOTES

- VIDEO CAMERA LOCATION / ALIGNING SHALL BE COORDINATED WITH THE SHA ENGINEER.
- ALL EXISTING TRAFFIC SIGNAL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE SIGNAL CONTRACTOR UPON COMPLETION OF THE MODIFIED SIGNAL, EXCEPT AS STATED ON THE GENERAL INFORMATION SHEET.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING ALL SIGNAL CABLE TO THE APPROPRIATE TERMINALS AND PROPERLY LABEL EACH CABLE.
- THE CONTRACTOR SHALL VERIFY ALL UNDERGROUND UTILITIES PRIOR TO INSTALLING PROPOSED SIGNAL EQUIPMENT. IF ANY UTILITY CONFLICTS SHOULD ARISE THE CONTRACTOR SHALL CONTACT THE PROJECT ENGINEER.
- ALL UNUSED SIGNAL CABLES SHALL BE REMOVED AND DISPOSED.

**PARSONS
BRINCKERHOFF**

100 S. Charles Street
Tower 1, 10th Floor
Baltimore, MD 21201
(Ph) 410-787-5050 / (Fax) 410-727-4608
<http://www.pbworld.com>

APPROVALS

TEAM LEADER
ASST. DIV. CHIEF
DIVISION CHIEF
OFFICE DIRECTOR

REVISIONS

① UPGRADE DETECTION TO VIDEO/INVASIVE DETECTION	SHA NO. XX6815185	TIMS NO. L198	3-07-2012
C REPLACE EXISTING DETECTION WITH VIDEO	JMC/C	LM	TIMS NO. 1383
B INSTALL OPTICOM VIDEO PRE-EMPTION FOR US 40	CJS	MAR	TIMS NO. E083

SIGNALIZATION PLAN SHEET

SCALE 1" = 20'	DATE 3-10-87	CONTRACT NO. CE-698-508-285
DESIGNED BY	COUNTY	CECIL
DRAWN BY W. RICHARDSON	LOGMILL	07004015.08
CHECKED BY S. RENZI	TIMS NO.	
F.A.P. NO.	TOD NO.	
TS NO. 2296C	DRAWING SG-01	C-02
SHEET NO. 01	OF 08	

PLOTTED: Monday, March 05, 2012 AT 11:22 AM
FILE: T:\173124A-TrafficDesign\services\THF\07\Paral\p8G-P001_BigElk.dwg