

EQUIPMENT LIST 'A'

EQUIPMENT TO BE FURNISHED BY THE SHA.

ITEM NO.	QUANTITY	DESCRIPTION
NONE	NONE	NONE

EQUIPMENT LIST 'B'


EQUIPMENT TO BE FURNISHED AND INSTALLED BY THE CONTRACTOR.

ITEM NO.	QUANTITY	DESCRIPTION
120500	1 LS	MAINTENANCE OF TRAFFIC
800000	1 EA	F&I SPLICER CABINET WITH TELEMETRY EQUIPMENT POLE OR POST MOUNTED
822001	6500 LF	12-PAIR COMMUNICATION CABLE, SELF-SUPPORTING (OVERHEAD)

EQUIPMENT LIST 'C'

EQUIPMENT TO BE REMOVED AND RETURNED TO SHA.


ITEM NO.	QUANTITY	DESCRIPTION
NONE	ALL REMOVED EQUIPMENT SHALL BECOME THE PROPERTY OF THE CONTRACTOR.	

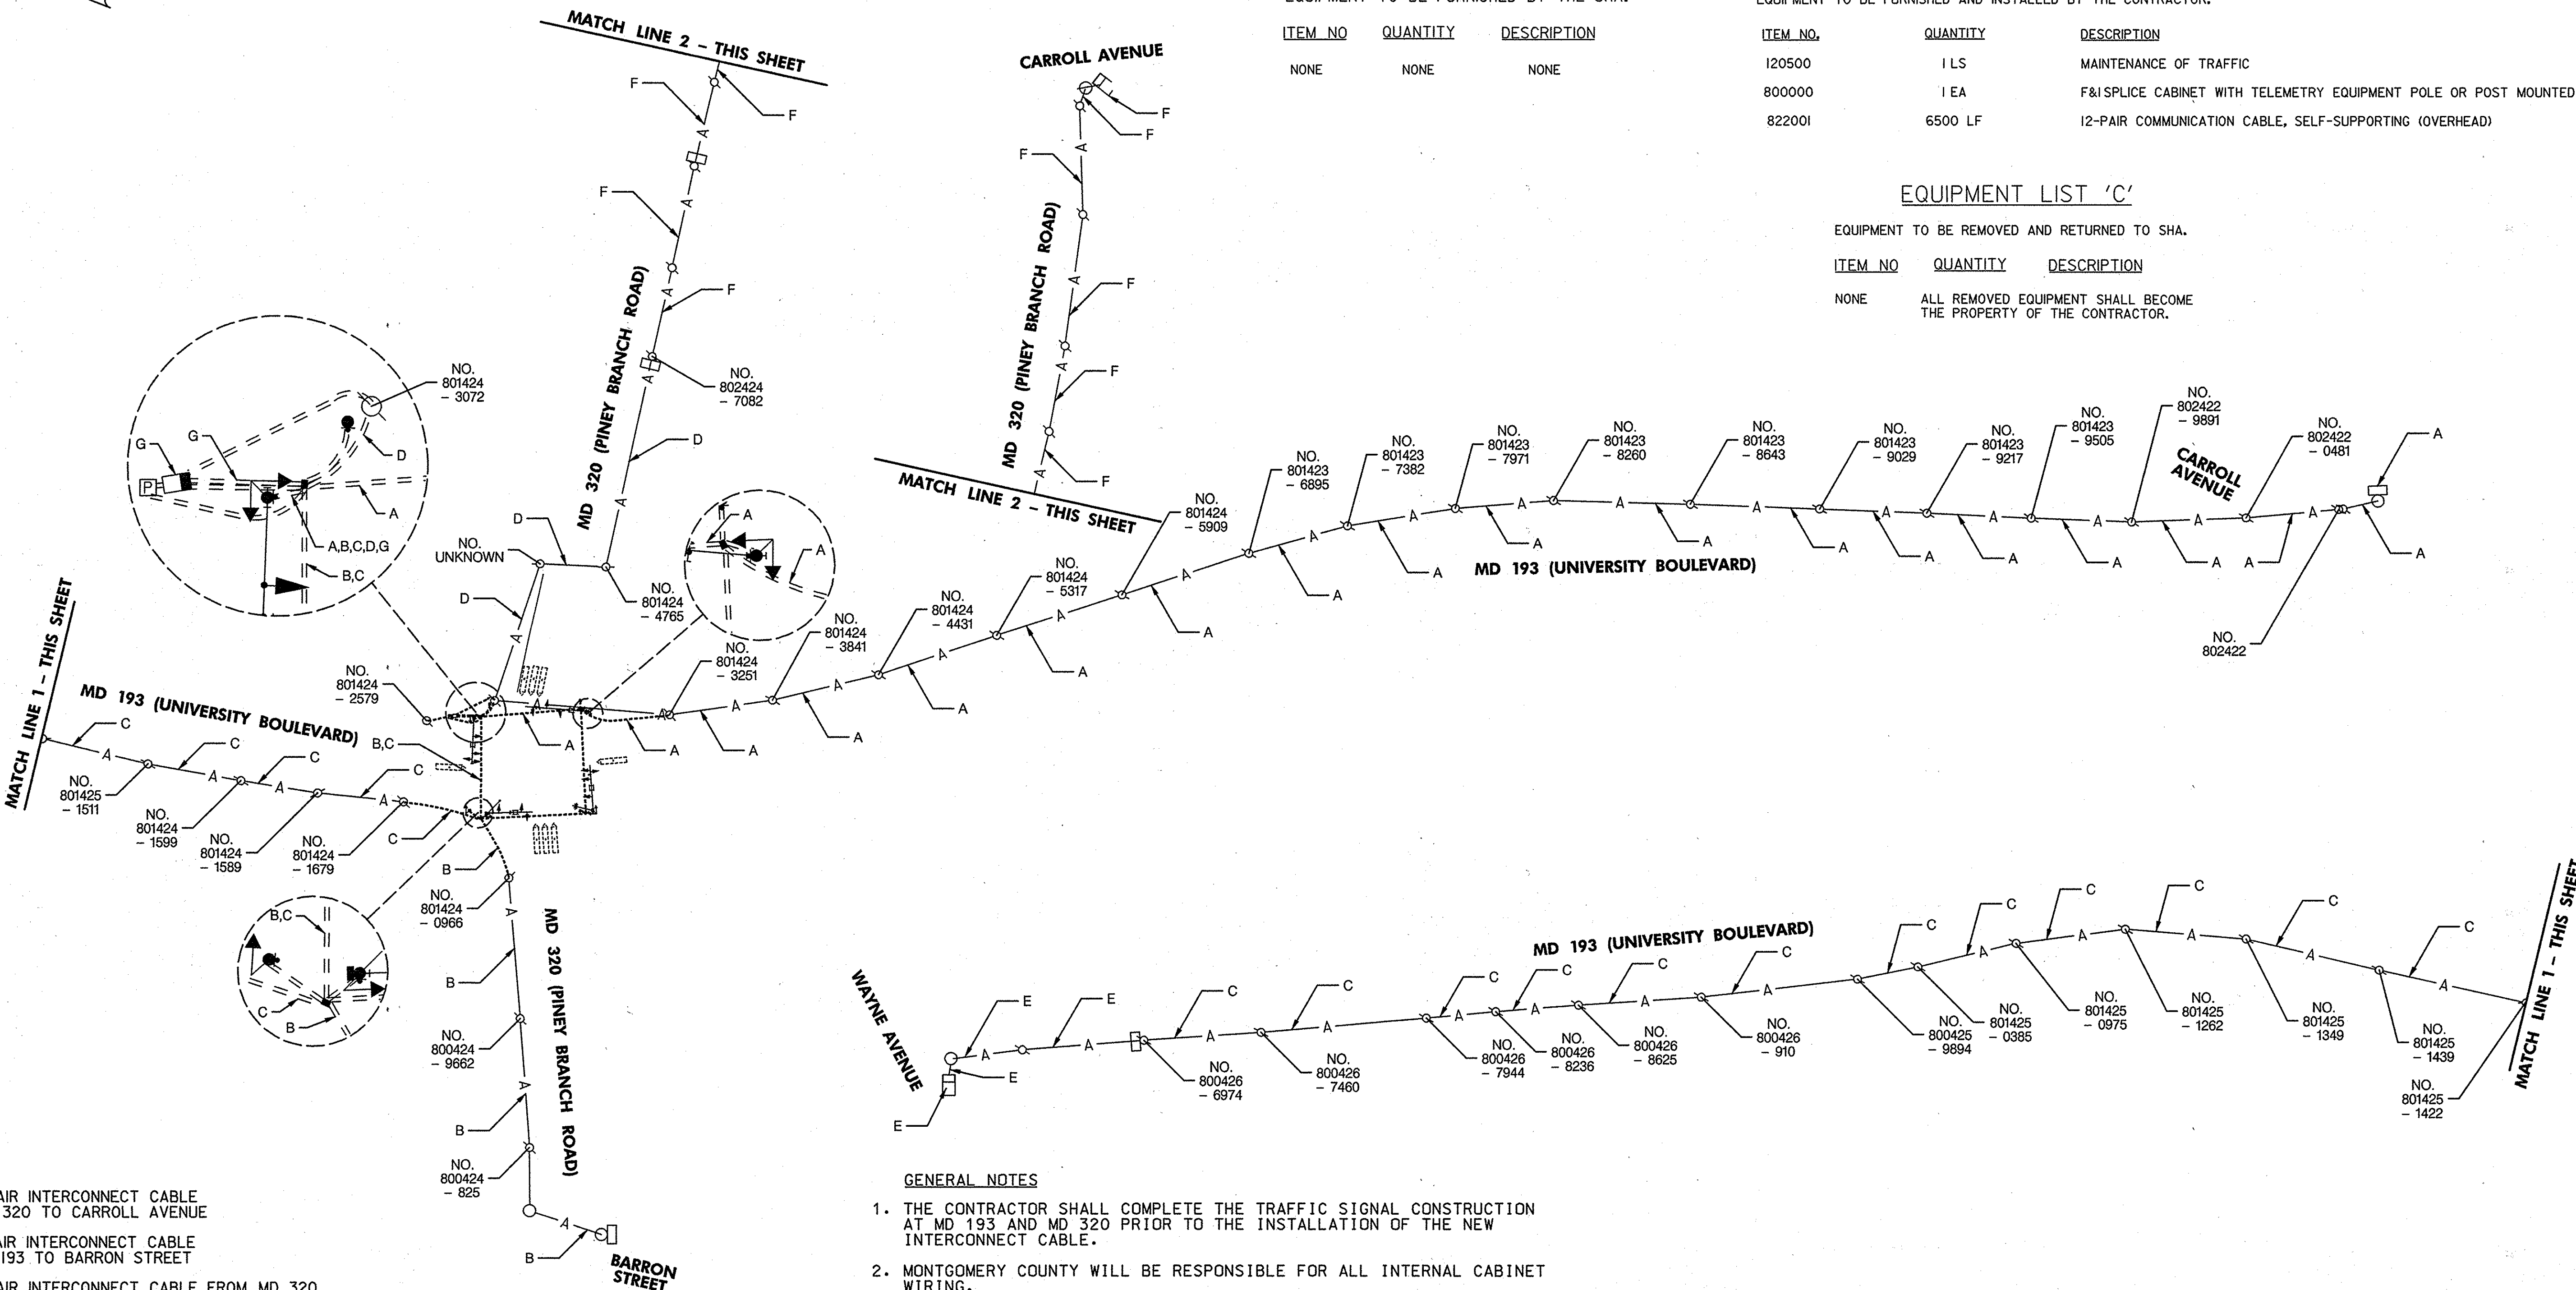


- A- NEW 12 PAIR INTERCONNECT CABLE FROM MD 320 TO CARROLL AVENUE
- B- NEW 12-PAIR INTERCONNECT CABLE FROM MD 193 TO BARRON STREET
- C- NEW 12 PAIR INTERCONNECT CABLE FROM MD 320 TO EXISTING INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 800426 - 6974 ON MD 193
- D- NEW 12 PAIR INTERCONNECT CABLE FROM MD 193 TO EXISTING INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 800426 - 7082 ON MD 320
- E- EXISTING INTERCONNECT CABLE FROM WAYNE AVENUE TO EXISTING INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 800426 - 6974 TO REMAIN
- F- EXISTING INTERCONNECT CABLE FROM CARROLL AVENUE TO EXISTING INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 802424 - 7082 TO REMAIN
- G- NEW 12 PAIR INTERCONNECT CABLE FROM FROM PROPOSED MD 193 AND MD 320 SPLICER CABINET TO BASE MOUNTED CABINET

GENERAL NOTES

1. THE CONTRACTOR SHALL COMPLETE THE TRAFFIC SIGNAL CONSTRUCTION AT MD 193 AND MD 320 PRIOR TO THE INSTALLATION OF THE NEW INTERCONNECT CABLE.
2. MONTGOMERY COUNTY WILL BE RESPONSIBLE FOR ALL INTERNAL CABINET WIRING.
3. ALL UTILITY POLES LABELED ARE MAINTAINED BY PEPCO UNLESS OTHERWISE NOTED.
4. THE CONTRACTOR SHALL FURNISH AND INSTALL NEW 12 PAIR SELF SUPPORTING INTERCONNECT CABLES FROM THE PROPOSED BASE MOUNTED CABINET TO THE FOLLOWING LOCATIONS: THE POLE MOUNTED CABINET AT MD 320 AND BARRON STREET; THE POLE MOUNTED CABINET AT MD 193 AND CARROLL AVENUE; THE INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 802424-7082 ON MD 320 BETWEEN MD 193 AND CARROLL AVENUE; AND THE INTERCONNECT SPLICER CABINET ON PEPCO POLE NO. 800426-6974 ON MD 193 BETWEEN MD 320 AND WAYNE AVENUE.
5. DISCONNECTING AND SPLICING OF INTERCONNECT CABLES IN THE TRAFFIC SIGNAL CABINETS SHALL BE PERFORMED BY MONTGOMERY COUNTY FORCES. THE CONTRACTOR SHALL RUN INTERCONNECT CABLES INTO EACH CABINET AND PROPERLY LABEL THEM. CONTACT MR. KAMAL HAMUD AT 240-777-8761 FORTY EIGHT (48) HOURS IN ADVANCE PRIOR TO INSTALLING INTERCONNECT CABLES.
6. THE CONTRACTOR SHALL REMOVE THE SELF SUPPORTING CABLE FROM THE UNDERGROUND PORTION OF THE INTERCONNECT CABLE.
7. INSTALL NEW OVERHEAD INTERCONNECT IMMEDIATELY UNDER EXISTING OVERHEAD INTERCONNECT. REMOVE EXISTING INTERCONNECT ONCE NEW INTERCONNECT IS FUNCTIONAL.




STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION



MD 193 (UNIVERSITY BOULEVARD) AT MD 320 (PINEY BRANCH ROAD)

INTERCONNECT GENERAL INFORMATION

SCALE	1" = 100'	ADVERTISED DATE	APRIL 2008	CONTRACT NO.	MO3945187
DESIGNED BY	SBS	COUNTY	MONTGOMERY		
DRAWN BY	SBS	LOGMILE	15019306.15		
CHECKED BY	BAB	TIMS NO.	H325		
F.A.P. NO.	SEE TITLE SHEET	TOD NO.			
TS NO.	3681E-IC	DRAWING	- OF	SHEET NO.	19 OF 21



STV Incorporated
engineers / architects / planners / construction managers
7125 Ambassador Road Baltimore, MD 21244-2722 (410) 944-9112