

PROJECT DESCRIPTION

I. GENERAL

THIS PROJECT INVOLVES THE INSTALLATION OF TWO (2) ADVANCED SCHOOL CROSSING HAZARD IDENTIFICATION BEACONS (HIB) ALONG MD 396 BETWEEN FT. SUMNER DRIVE AND BRILEY PLACE IN MONTGOMERY COUNTY. MD 396 IS ASSUMED TO RUN IN A NORTH-SOUTH DIRECTION.

II. INTERSECTION OPERATION

THE HIB'S WILL BE ACTIVATED BY TIME CLOCK FOR WEEKDAY SCHOOL CROSSINGS TO THE WESTLAND MIDDLE SCHOOL FOR THE HOURS OF 7:15 - 8:15 AM AND 2:30 - 3:30 PM.

EQUIPMENT LIST FOR CONTRACT NO. XX6555185

A. EQUIPMENT TO BE FURNISHED BY STATE HIGHWAY ADMINISTRATION

ITEM	QUANTITY	UNIT	DESCRIPTION
9037	2	EA	[UPDATED] CABINET "G" TYPE POLE MOUNT
9042	2	EA	[UPDATED] CONTROLLER ASC II WITH TELEMETRY
9571	48	SF	[UPDATED] SHEET ALUMINUM MAST ARM/POLE MOUNTED SIGN
	2	EA	SI-1(1) (96"x36") MAST ARM MOUNTED

B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY CONTRACTOR

ITEM	QUANTITY	UNIT	DESCRIPTION
1001	1	EA	MAINTENANCE OF TRAFFIC
2001	2	CY	CLASS 2 EXCAVATION
2002	1	CY	TEST PIT EXCAVATION
6002	165	SF	5 INCH CONCRETE SIDEWALK
8001	4	EA	12 INCH LED SIGNAL HEAD SECTION
8012	2	EA	METERED SERVICE PEDESTAL - EMBEDDED (100 AMPS)
8019	2	EA	MAST ARM POLE & 60' MAST ARM ANY "T" DIMENSION
8030	400	LF	3 WIRE, 1 CONDUCTOR ELECTRICAL CABLE (NO. 2 AWG TWHN/THHN)
8039	50	LF	UP TO 4 INCH SCHEDULE 80 RIGID PVC CONDUIT-TRENCHED
8040	200	LF	WOOD SIGN SUPPORTS UP TO 4'x6' (FOR RETAINING WALL)
8041	48	SF	INSTALL OVERHEAD OR GROUND MOUNTED SIGN (INCLUDING ALL HARDWARE)
8043	50	LF	NO. 6 AWG STRANDED BARE COPPER GROUND WIRE
8046	100	LF	3 WIRE, 1 CONDUCTOR ELECTRICAL CABLE (NO. 8 AWG/THHN)
8047	2	EA	FURNISH AND INSTALL ELECTRIC HANDHOLE
8056	175	LF	ELECTRICAL CABLE - 5 CONDUCTOR (NO. 14 AWG)
8062	2	EA	INSTALL CONTROLLER AND CABINET - POLE MOUNT

CONTACTS

The contact persons for this project are as follows:

Mr. Cedrick Ward (Mont.)
Assistant District Engineer - Traffic
Phone: (301) 513-7404

Mr. Vernon Stinnett
Assistant District Engineer - Maintenance
Phone: (301) 513-7304

Mr. Victor Grafton
Utility Engineer
Phone: (301) 513-7315

Mr. Richard L. Daff, Sr.
Chief, Traffic Operations Division
Phone: (410) 787-7630

Mr. Ed Rodenhizer
Supervisor, Signal Operations
Phone: (410) 787-7650

Mr. Sonny Bailey
Supervisor, Sign Shop
Phone: (410) 787-7676


Mr. Mike Stocker
Supervisor, Signal Warehouse
Phone: (410) 787-7688

Power Company Representative - PEPCO (MONT)

PHASE CHART

	1	2	3	4
	Y	Y	Y	Y
NORMAL OPERATION				
	DARK	DARK	DARK	DARK
FLASHING OPERATION				
7:15-8:15 AM	FL/Y	FL/Y	FL/Y	FL/Y
2:30-3:30 PM	FL/Y	FL/Y	FL/Y	FL/Y

WIRING DIAGRAM

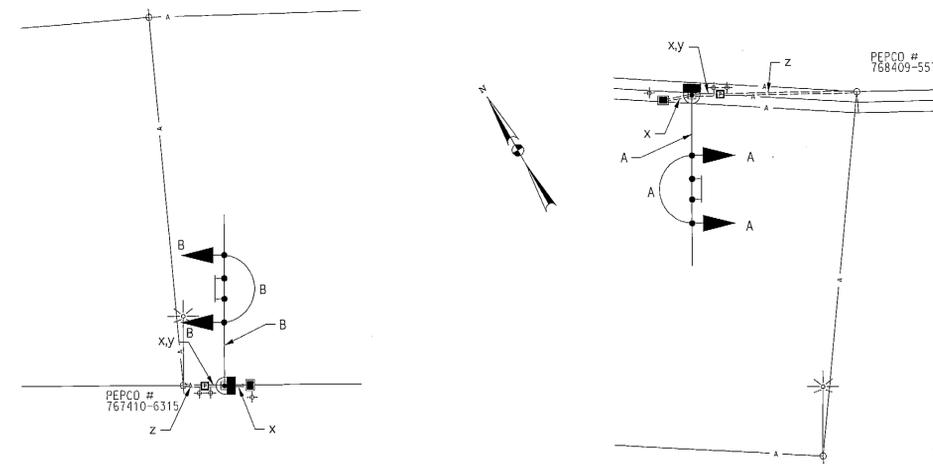

WIRING KEY

- AB } 5 CONDUCTOR ELECTRICAL CABLE (NO. 14 AWG)
- x } NO. 6 AWG STRANDED BARE COPPER GROUND WIRE
- y } 3 WIRE, 1-CONDUCTOR ELECTRICAL CABLE (NO. 8 AWG THHN/THWN)
- z } 3 WIRES, 1-CONDUCTOR ELECTRICAL CABLE (NO. 2 AWG/THHN)
- + } GROUND ROD

TOD NO: XX655-02
SHA NO: MO972852
MD 396 @ Little Flower School
Church and Westland Middle

SH&A STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION
MD 396 (MASSACHUSETTS AVENUE) BETWEEN
FT. SUMNER DRIVE AND BRILEY PLACE
LITTLE FLOWER AND WESTLAND MIDDLE SCHOOLS
BETHESDA, MD

GENERAL INFORMATION PLAN SHEET

SCALE NONE ADVERTISED DATE 07/2011 CONTRACT NO. XX6555185

DESIGNED BY CW COUNTY MONTGOMERY
DRAWN BY CW LOGMILE 15039601.34
CHECKED BY JB [Signature] TIMS NO. L001
F.A.P. NO. TOD NO.

TS NO. 4799 DRAWING - OF SHEET NO. 2 OF 2

BAI BRUDIS & ASSOCIATES, INC.
Consulting Engineers
9240 Rumney Road, Suite C
Columbia, Maryland 21045
Phone 410-884-3607
www.brudis.com

BY: john -