


CONSTRUCTION DETAILS

- A. USE PROPOSED CONDUIT. INSTALL 12-PAIR COMMUNICATION CABLE. (SEE SIGNAL PLANS)
- B. USE PROPOSED HANDHOLE. INSTALL 12-PAIR COMMUNICATION CABLE. (SEE SIGNAL PLANS)
- C. USE PROPOSED BASE MOUNTED CABINET AND CONTROLLER. INSTALL 12 PAIR COMMUNICATION CABLE. (SEE SIGNAL PLANS)
- G. INSTALL 3 IN. PVC SCHEDULE 80 ELECTRICAL CONDUIT - TRENCHED. INSTALL 12-PAIR COMMUNICATION CABLE.
- K. INSTALL 40 FT. CLASS II WOOD POLE, 3 IN. ELECTRICAL CONDUIT PVC RISER AND BACK GUYS.
- L. INSTALL 3/8 IN. SPAN WIRE AND 12-PAIR COMMUNICATION CABLE.

GENERAL NOTE

- 1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING ALL SIGNAL CABLE TO THE APPROPRIATE TERMINALS AND PROPERLY LABEL EACH CABLE.

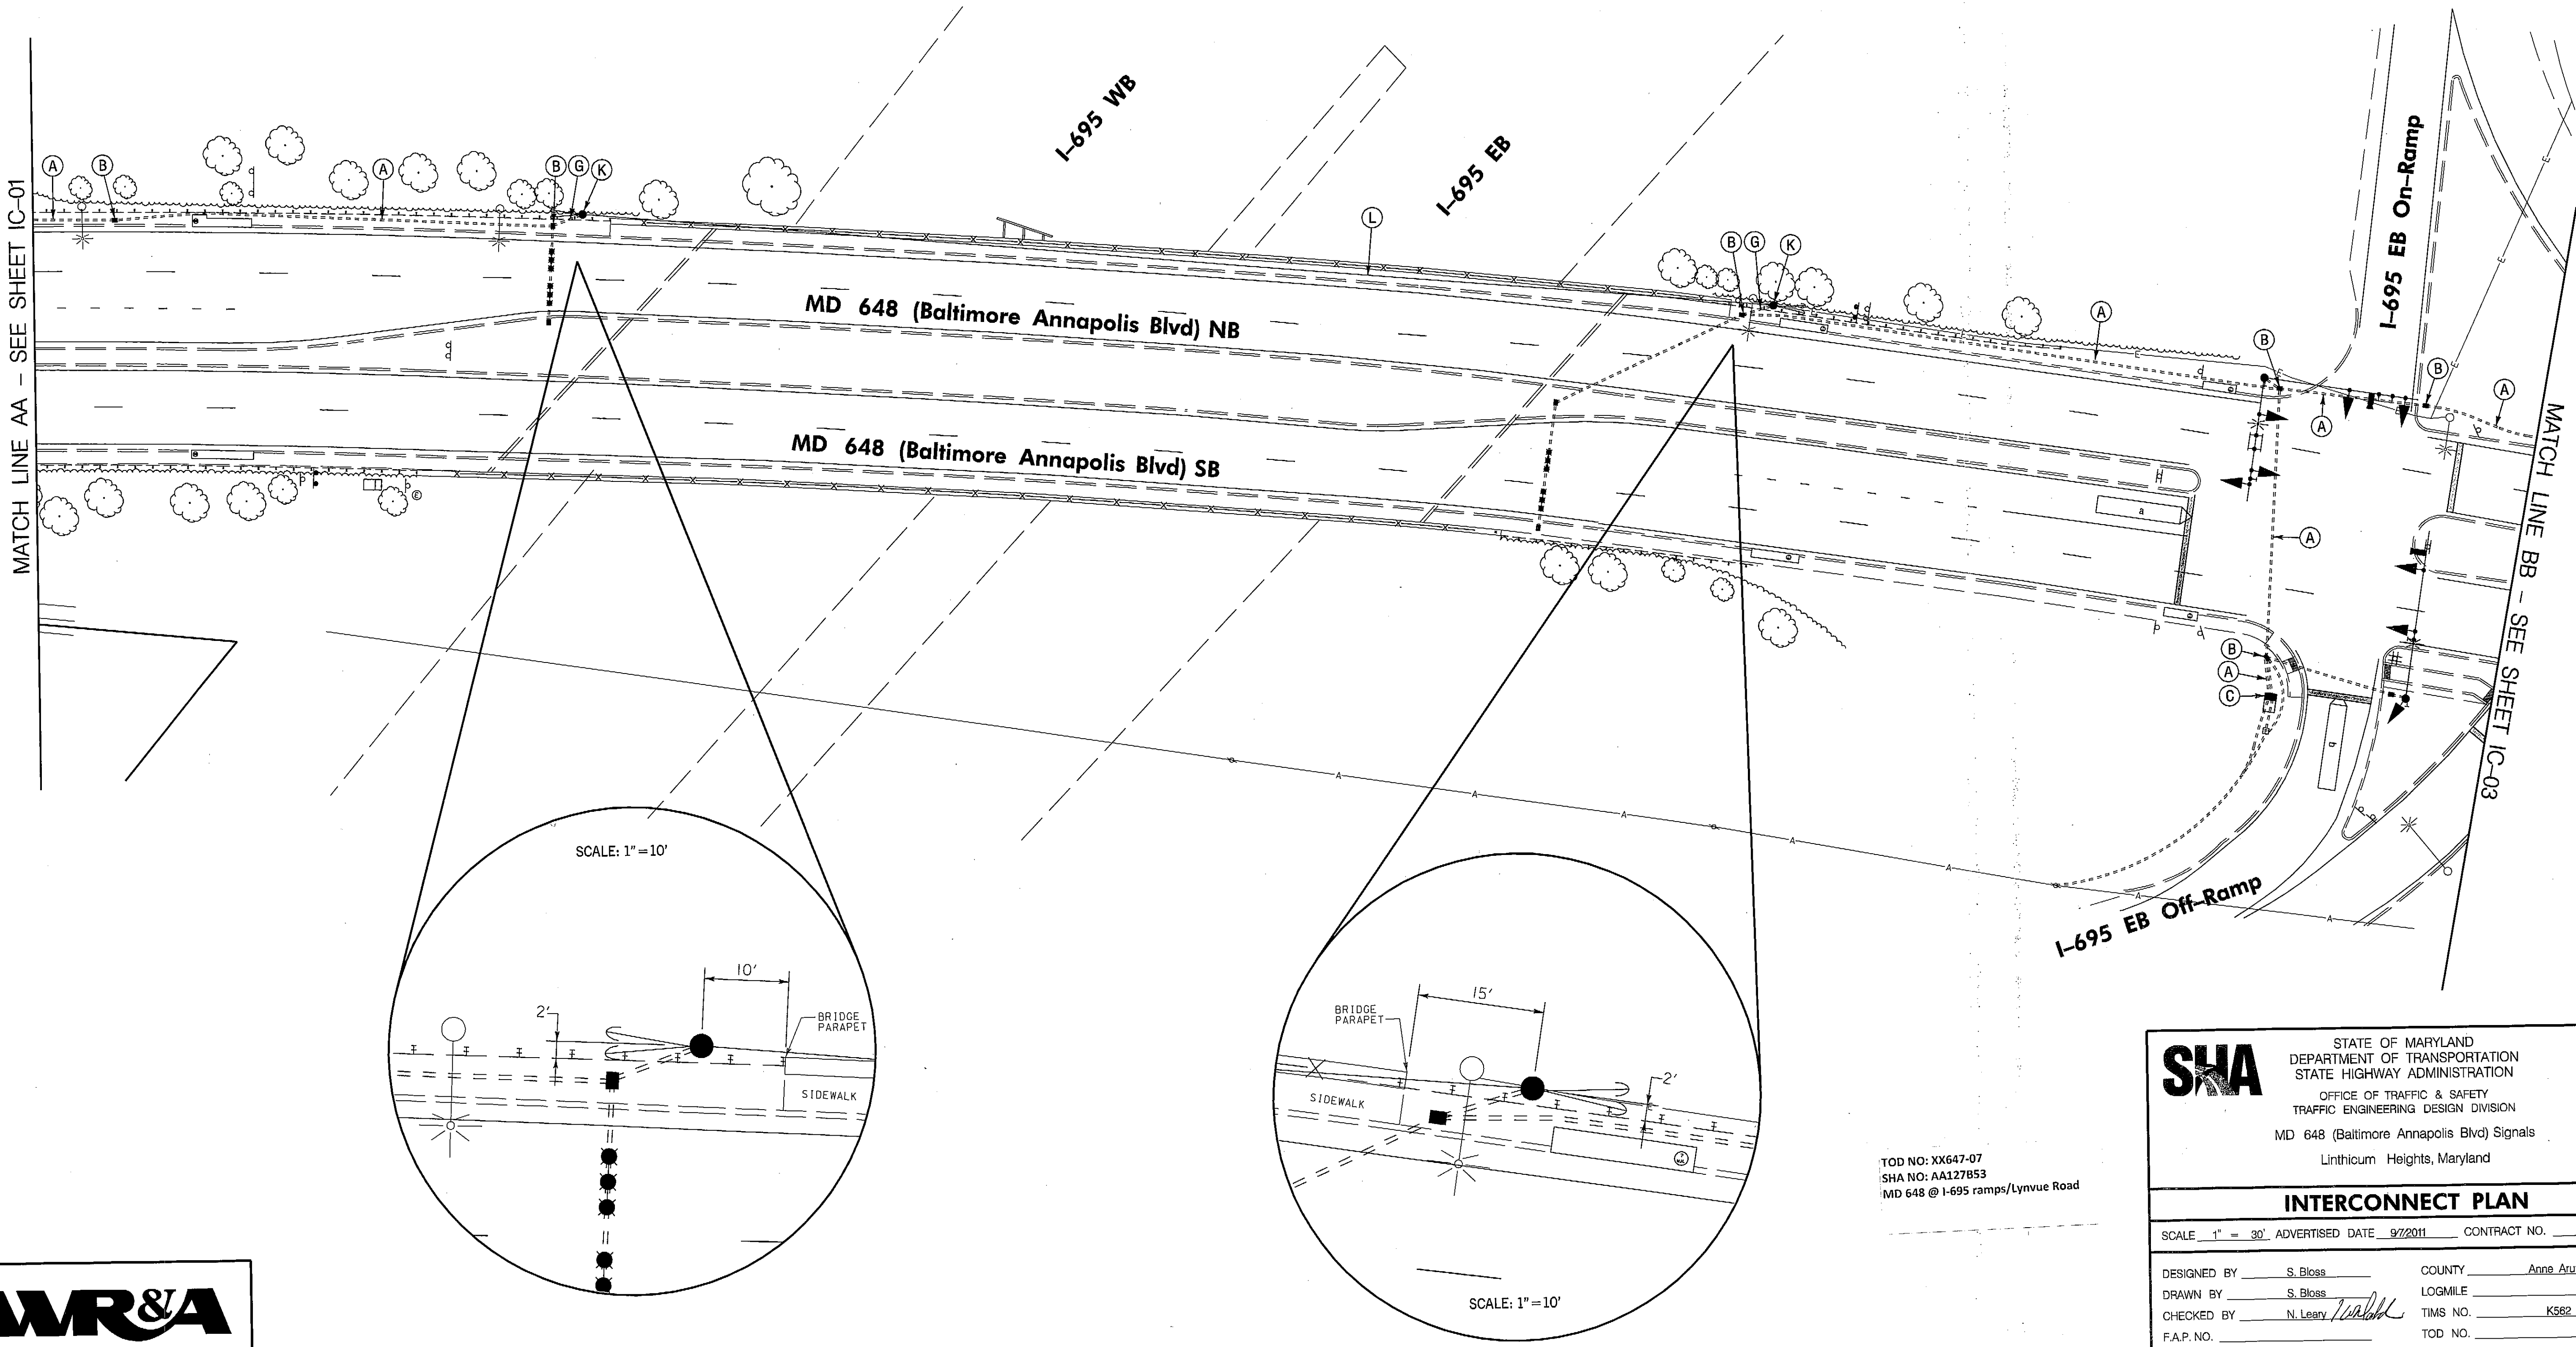

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION
MD 648 (Baltimore Annapolis Blvd) Signals
Linthicum Heights, Maryland

INTERCONNECT PLAN

SCALE 1" = 30' ADVERTISED DATE 9/7/2011 CONTRACT NO. XX6475185

DESIGNED BY S. Bloss COUNTY Anne Arundel
DRAWN BY S. Bloss LOGMILE
CHECKED BY N. Leary TMS NO. K562
F.A.P. NO. TOD NO.

TS NO. DRAWING IC-02 OF 3 SHEET NO. 4 OF 6



WHITMAN, REQUARDT
& ASSOCIATES, LLP
801 South Caroline Street, Baltimore, Maryland 21231

TOD NO: XX647-07
SHA NO: AA127853
MD 648 @ I-695 ramps/Lynvue Road