PROJECT DESCRIPTION

**GENERAL** 

THIS PROJECT INVOLVES THE MODIFICATION OF A EXISTING TRAFFIC SIGNAL AT MD 528 (PHILADELPHIA AVE.) AND 30TH STREET IN WORCHESTER COUNTY. THE EXISTING LOOP DETECTORS FOR THE LEFT TURNS FOR MD 528 AND THE PRESENCE DETECTION OF THE SIDE ROADS OF 30TH STREET SHALL BE REMOVED. NEW OVERHEAD VIDEO DETECTION CAMERA'S SHALL BE INSTALLED TO THE MAST ARM'S OF MD 528 AND 30TH STREET FOR THE ACTUATION OF LEFT TURNS FOR NORTH AND SOUTHBOUND MD 528 AND FOR THE SIDE STREET PRESENCE DETECTION OF 30TH STREET.

INTERSECTION OPERATION

A CONTROLLER HOUSED IN AN EXISTING BASE MOUNTED CABINET IS INSTALLED AT THIS LOCATION. THE INTERSECTION OPERATES IN A FULLY ACTUATED MODE USING 6 NEMA PHASES. VIDEO DETECTION CAMERAS SHALL BE INSTALLED AT THIS LOCATION FOR THE ACTUATION OF THE LEFT TURNS FOR THE MAINLINE (MD 528 PHILADELPHIA AVE.) AND THE SIDE STREET PRESENCE DETECTION OF 30TH STREET.

### SPECIAL NOTES

1. THE FOLLOWING CONTACT PERSONS FOR THIS PROJECT ARE AS FOLLOWS:

PROJECT CONTACTS:

MR. GENE COFIELD, ASSISTANT DISTRICT ENGINEER - TRAFFIC PHONE: (410) 677-4040

MR. JAMES R. WRIGHT, ASSISTANT DISTRICT ENGINEER-MAINTENANCE

PHONE: (410) 677-4010

MS. RAVINDRA GANVIR. ASSISTANT DISTRICT ENGINEER- CONSTRUCTION PHONE: (410) 677-4020

MR. BRUCE W. POOLE, UTILITY ENGINEER

PHONE: (410) 677-4082

MR. RICHARD L. DAFF, SR. CHIEF TRAFFIC OPERATIONS DIVISION

PHONE: (410) 787-7630

2. MAINTENANCE OF TRAFFIC WILL BE HANDLED BY THE CONTRACTOR UTILIZING STANDARD PLATES FOR TRAFFIC CONTROL.

## **EQUIPMENT LIST**


A. EQUIPMENT TO BE SUPPLIED BY THE ADMINISTRATION. ITEM NO. DESCRIPTION QUANTITY 9086 VIDEO DETECTION INTERFACE EQUIPMENT: 1-4 CAMERAS

B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY THE CONTRACTOR.

ITEM NO. DESCRIPTION UNITS QUANTITY MAINTENANCE OF TRAFFIC PER ASSIGNMENT REMOVE AND DISPOSE OF EQUIPMENT PER ASSIGNMENT VIDEO DETECTION CAMERA CONTROL CABLE, 250 FOOT, VIDEO DETECTION CAMERA TO CONTROLLER CONTROL CABLE, 500 FOOT, VIDEO DETECTION CAMERA TO CONTROLLER 1001 8004 \* SEE SHEET 2 8026 EA EA 8027

C. MATERIALS TO BE REMOVED BY THE CONTRACTOR SHALL BECOME THE PROPERTY OF THE CONTRACTOR.

## WIRING DIAGRAM

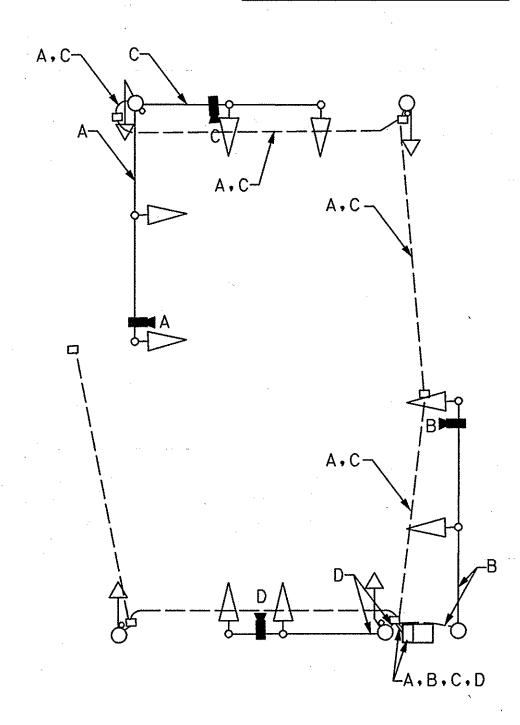

VIDEO DETECTION CABLE

# PHASE CHART

7 8 9 10 11 12 

	PHASE 1 AND 5	<b>←</b> G⁄R	R	+G⁄R	R	R	R	R	R	DW	DW.	DW	DW	
	1 AND 5 CHANGE TO 1 AND 6, 2 AND 5, OR 2 AND 6												√ ,	
	PHASE 1 AND 6	<b>4</b> -G∕G	G	R	R	R	R	R	R	DW	DW	DW,	DW	<b>一</b>
	1 ANDNGECHANGE	<b>←</b> Y/G	G	R	R	R	R	R	R	DW	DW	DW	DW	
	PHASE 2 AND 5	R	R	<b>←</b> G⁄G	G	R	R	R	R	DW	DW	DW	DW	<b>↑</b>
	2 ANDNGECHANGE	R	R	+Y⁄G	G	R	R	R	R	DW	DW	DW	DW	·
	PHASE 2 AND 6	G	G	G	G	R	R	R	R	DW	DW	DW	DW	<b>↓</b>
	2 AND 6 CHANGE	Y	Υ	Υ	Υ	R	R	R	R	DW	DW	DW	DW	
	PHASE 4 AND 8	R	R	R	R	G	G	G	G	DW	DW	DW	DW	4 ⊦
	4 AND 8 CHANGE	R	R	R	R	Υ	Υ	Y	Y	DW	DW	DW	DW	-
	PHASE 4 AND 8 ALT	R	R	R	R	G	G	G	G	WK.	WK	WK	WK	01 10
-	PED CLEARANCE	R	R	R	R	G	G	G	G	FL/DW	FL⁄DW	FL⁄DW	FL⁄DW	1:1分片
	4 AND 8 ALT CHANGE	R	R	R	R	Υ	Υ	Y	Υ	DW	DW	DW	DW	
	FLASHING OPERATION	FL/Y	FL/Y	FL/Y	FL/Y	FL/R	FL/R	FL/R	FL/R	DARK	DARK	DARK	DARK	‡ Δ

STATE OF MARYLAND DEPARTMENT OF TRANSPORTATION STATE HIGHWAY ADMINISTRATION

OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION MD 528 (PHILADELPHIA AVE.) AT

> **30TH STREET** OCEAN CITY, MARYLAND

GENERAL INFORMATION PLAN SCALE N.T.S. CONTRACT NO. AT7255185 DATE <u>08/24/07</u>

DESIGNED BY S. SMITH CHECKED BY J. WEAVER COUNTY WORCESTER LOGMILE \_\_\_23052806.86 T.I.M.S. NO. <u>H928</u>

TS NO. 2260B

DRAWING 2 OF 2 SHEET NO. 4. OF 16

TOD NO. \_

SABRA, WANG & ASSOCIATES, INC 1504 JOH AVENUE SUITE 160 BALTIMORE, MD 21227 (410) 737-8584 WWW.SABRA-WANG.COM

TOD No: AT725-12

SHA No: WO440A52/B52

MD 528: 26th Street to 65th Street