

SS SOUTHBOUND MD 528

# GENERAL NOTES

- FOR 5 INCH CONCRETE SIDEWALK RECONSTRUCTION, SEE TYPICAL SECTION, THIS SHEET.
- ALL DIMENSIONS ARE APPROXIMATE. CONTRACTOR TO VERIFY ALL DIMENSIONS IN THE FIELD.
- NO DISTURBED AREA SHALL BE LEFT UNSTABILIZED OVERNIGHT UNLESS THE RUNOFF IS DIRECTED TO AN APPROVED SEDIMENT CONTROL DEVICE.
- SIDEWALK RECONSTRUCTION LIMITS SHALL COINCIDE WITH CRACK CONTROL JOINTS (JOINTER GROOVES) OR EXPANSION JOINTS IN EXISTING SIDEWALK. NEW EXPANSION JOINTS SHALL BE PROVIDED AT THE INTERFACE OF EXISTING AND PROPOSED SIDEWALK. SEE SHA. STD. NO. MD-655.01.
- INSTALL DETECTABLE WARNING SURFACE ON SIDEWALK RAMP AS PER SHA. STD. NO. MD-655.40.
- FORM NEW SIDEWALK AND EXPANSION JOINT MATERIAL AROUND EX. UTILITY POLES, MANHOLE COVERS, VALVE COVERS, AND FIRE HYDRANTS AS NECESSARY.
- RESET ANY SIGNS DISTURBED BY THE CONSTRUCTION AS DIRECTED BY THE ENGINEER.
- EXISTING INLETS SHALL NOT BE DAMAGED DURING CONSTRUCTION. DAMAGE TO THE INLETS WILL REQUIRE THE INLET TO BE REPLACED AT NO ADDITIONAL COST TO THE ADMINISTRATION.
- EXISTING TREES, SHRUBS, AND THEIR RESPECTIVE ROOT SYSTEMS SHALL NOT BE DISTURBED DURING CONSTRUCTION.

## LEGEND

- DETECTABLE WARNING SURFACE  
SHA STD. NO. MD-655.40
- CONCRETE PAVEMENT
- HOT MIX ASPHALT

COMBINATION CURB AND GUTTER ANY HEIGHT OR DEPTH	
LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	47
SOUTHWEST QUADRANT	85

8 INCH PORTLAND CEMENT CONCRETE FOR DRIVEWAY MIX 9	
LOCATION	QUANTITY (SF)
SOUTHWEST QUADRANT	24


HOT MIX ASPHALT SUPERPAVE 9.5 MM FOR SURFACE, PG 76-22, LEVEL-3	
LOCATION	QUANTITY (TON)
SOUTHWEST QUADRANT	2 (DRIVEWAY ENTRANCE TIE-IN)
SOUTHWEST QUADRANT	1.2 (SLOT BACKFILL)
NORTHWEST QUADRANT	0.8 (SLOT BACKFILL)

STANDARD TYPE A CURB ANY DEPTH	
LOCATION	QUANTITY (LF)
SOUTHWEST QUADRANT	50

MIX NO. 9 CONCRETE FOR SLOT BACKFILL	
LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	47
SOUTHWEST QUADRANT	85

DETECTABLE WARNING SURFACE SHA STD. NO. MD-655.40	
LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	10
SOUTHWEST QUADRANT	30

5 INCH CONCRETE SIDEWALK	
LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	212
SOUTHWEST QUADRANT	225

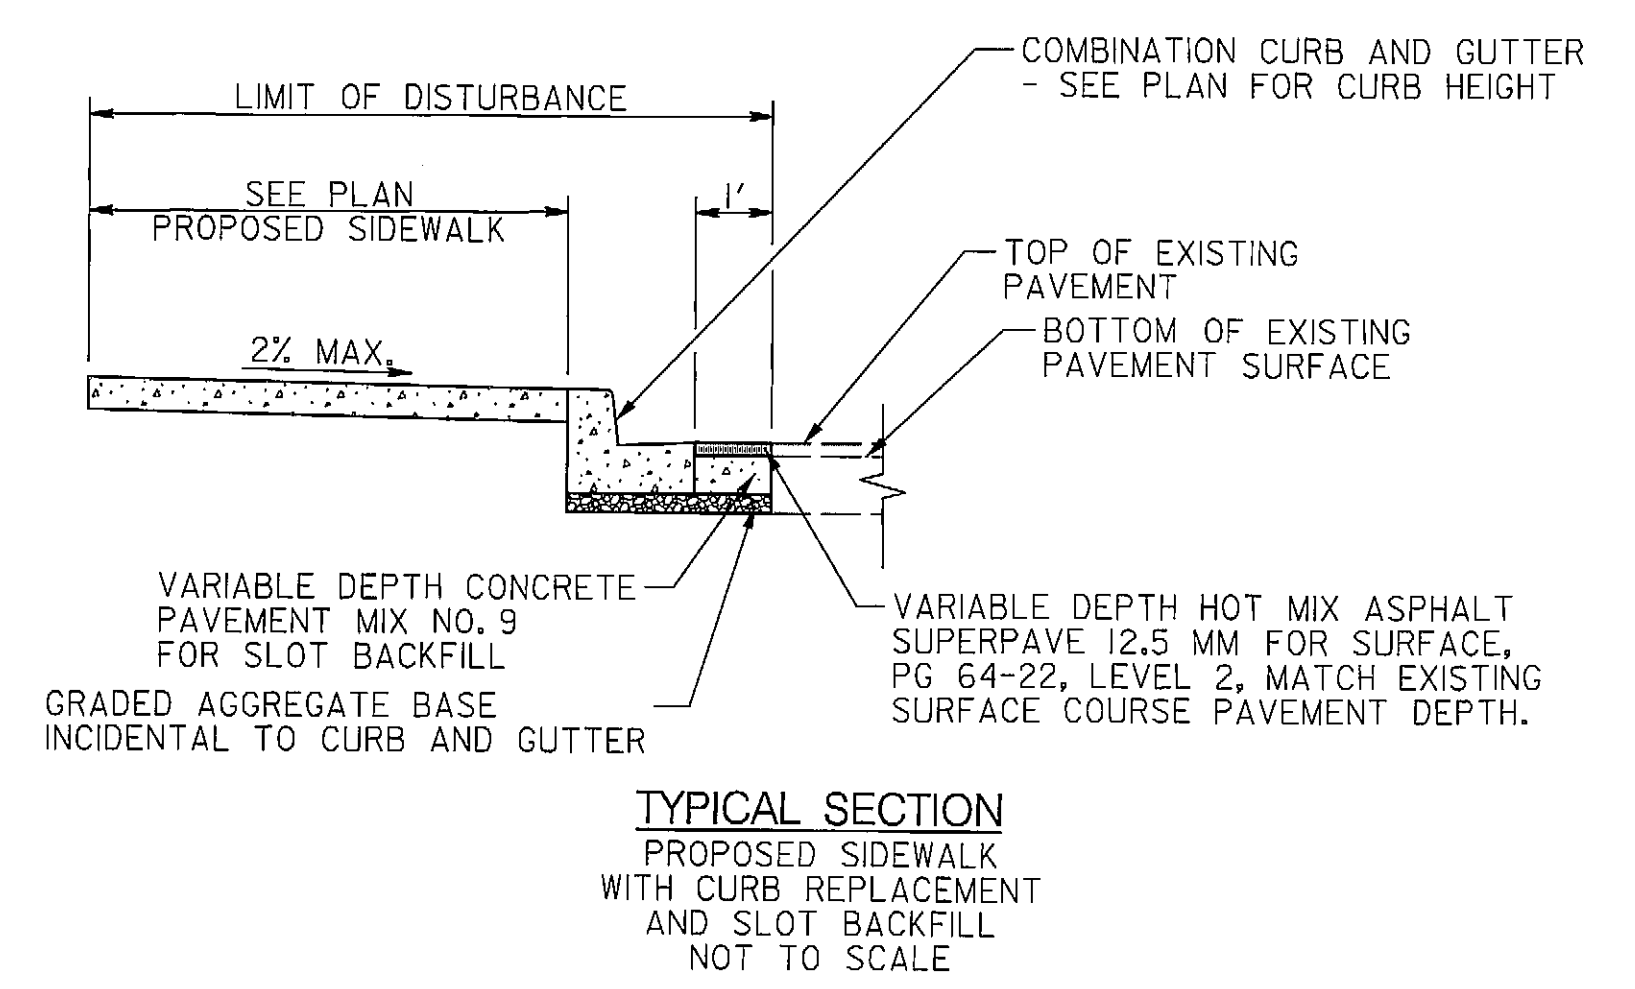

**RK&K**

RUMMEL, KLEPPER & KAHL, LLP  
81 MOSHER STREET | BALTIMORE, MD 21217  
PH: (410) 728-2900 FAX: (410) 728-3160

Engineers | Construction Managers | Planners | Scientists  
www.rkk.com

**SHA** STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF TRAFFIC & SAFETY  
TRAFFIC ENGINEERING DESIGN DIVISION

**MD 528 (COASTAL HIGHWAY) AT 33<sup>RD</sup> STREET**  
OCEAN CITY, MD.

**RAMP DETAILS**

SCALE 1" = 5' DATE JUNE 2012 CONTRACT NO. XX1285133

DESIGNED BY JDG COUNTY WORCESTER  
DRAWN BY JBB LOGMILE 23052806.39  
CHECKED BY ATD TMS NO. L367  
FAP NO. SEE TITLE SHEET TOD NO.

TS NO. 416K-DE DRAWING DE - 1 OF 2 SHEET NO. 3 OF 26