

COMBINATION CURB AND GUTTER ANY HEIGHT OR DEPTH	
LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	53
SOUTHWEST QUADRANT	43

HOT MIX ASPHALT SUPERPAVE 9.5 MM FOR SURFACE, PG 76-22, LEVEL-3	
LOCATION	QUANTITY (TON)
SOUTHWEST QUADRANT	0.75
SOUTHWEST QUADRANT	0.75

STANDARD TYPE A CURB ANY DEPTH	
LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	30

MIX NO. 9 CONCRETE FOR SLOT BACKFILL	
LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	53
SOUTHWEST QUADRANT	43

DETECTABLE WARNING SURFACE SHA STD. NO. MD-655.40	
LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	30
SOUTHWEST QUADRANT	30

5 INCH CONCRETE SIDEWALK	
LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	312
SOUTHWEST QUADRANT	201


GENERAL NOTES

- FOR 5 INCH CONCRETE SIDEWALK RECONSTRUCTION, SEE TYPICAL SECTION, THIS SHEET.
- ALL DIMENSIONS ARE APPROXIMATE. CONTRACTOR TO VERIFY ALL DIMENSIONS IN THE FIELD.
- NO DISTURBED AREA SHALL BE LEFT UNSTABILIZED OVERNIGHT UNLESS THE RUNOFF IS DIRECTED TO AN APPROVED SEDIMENT CONTROL DEVICE.
- SIDEWALK RECONSTRUCTION LIMITS SHALL COINCIDE WITH CRACK CONTROL JOINTS (JOINTER GROOVES) OR EXPANSION JOINTS IN EXISTING SIDEWALK. NEW EXPANSION JOINTS SHALL BE PROVIDED AT THE INTERFACE OF EXISTING AND PROPOSED SIDEWALK. SEE SHA. STD. NO. MD-655.01.
- INSTALL DETECTABLE WARNING SURFACE ON SIDEWALK RAMP AS PER SHA STD. NO. MD-655.40.
- FORM NEW SIDEWALK AND EXPANSION JOINT MATERIAL AROUND EX. UTILITY POLES, MANHOLE COVERS, VALVE COVERS, AND FIRE HYDRANTS AS NECESSARY.
- RESET ANY SIGNS DISTURBED BY THE CONSTRUCTION AS DIRECTED BY THE ENGINEER.
- EXISTING INLETS SHALL NOT BE DAMAGED DURING CONSTRUCTION. DAMAGE TO THE INLETS WILL REQUIRE THE INLET TO BE REPLACED AT NO ADDITIONAL COST TO THE ADMINISTRATION.
- EXISTING TREES, SHRUBS, AND THEIR RESPECTIVE ROOT SYSTEMS SHALL NOT BE DISTURBED DURING CONSTRUCTION.


LEGEND



DETECTABLE WARNING SURFACE
SHA STD. NO. MD-655.40



CONCRETE PAVEMENT

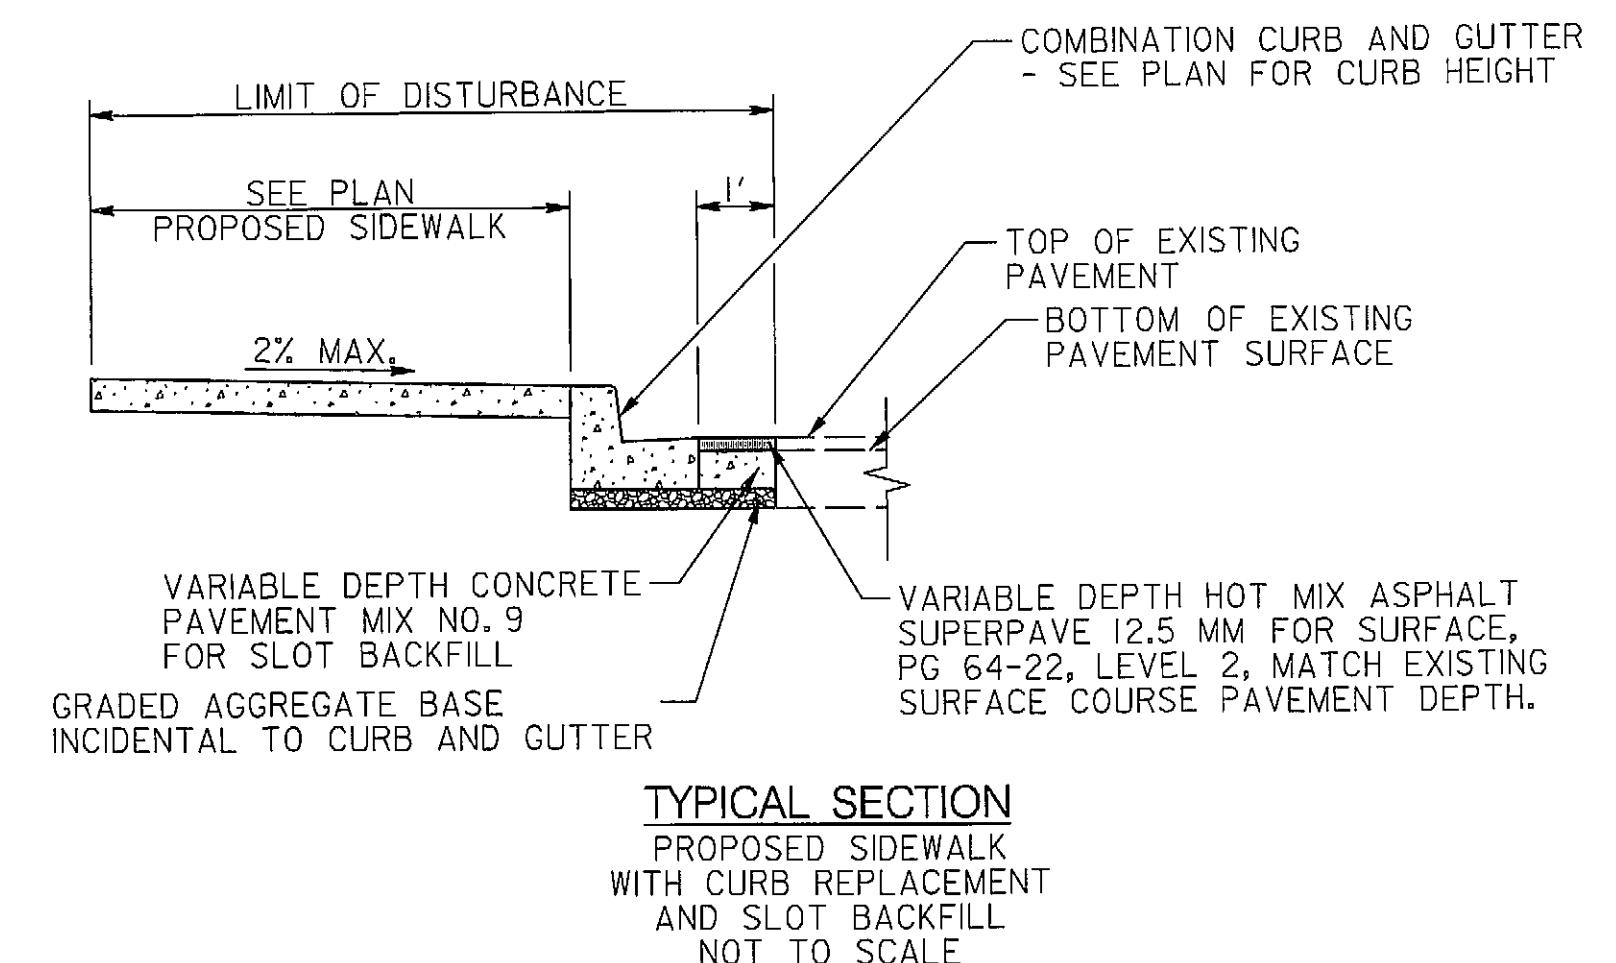

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

**MD 528 (COASTAL HIGHWAY) AT CONVENTION
CENTER DRIVE, OCEAN CITY, MD.**

RAMP DETAILS

SCALE	1" = 5'	DATE	JUNE 2012	CONTRACT NO.	XX1285133
DESIGNED BY	JDG	COUNTY	WORCESTER		
DRAWN BY	JBB	LOGMILE	23052806.02		
CHECKED BY	ATD	TIMS NO.			
FAP NO.	SEE TITLE SHEET	TOD NO.			
TS NO. 575L-DE	DRAWING DE - 1	OF 2		SHEET NO. 7	OF 26



RUMMEL, KLEPPER & KAHL, LLP
81 MOSHER STREET | BALTIMORE, MD 21217
PH: (410) 728-2900 FAX: (410) 728-3160

Engineers | Construction Managers | Planners | Scientists
www.rkk.com